


## CUSHIONWORX LITE™

CushionWorx™ premium polyethylene foam cushion underlayment, performs with EcoWorx® carpet tile for comfort underfoot and sound reduction in moderate traffic areas.

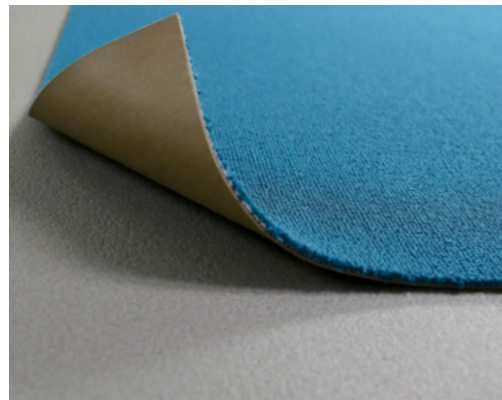

### FEATURES

- Provides more noticeable sound reduction and underfoot comfort than with EcoWorx® carpet tile alone.

### SUGGESTED APPLICATIONS

**Hospitality Rooms**

### SPECIFICATIONS

warranty: **commercial limited warranty**  
traffic class: **class I-moderate commercial**

	<i>u.s.</i>	<i>metric</i>
roll size:	<b>76 in.x120 ft</b>	<b>1.93x36.58m</b>
thickness:	<b>0.080 in</b>	<b>2.032 mm</b>
weight:	<b>20 lbs/roll</b>	<b>9.07 kg/roll</b>
density:	<b>4.0 lb/ft³</b>	<b>64 kg/m³</b>
square yards per roll	<b>84.4</b>	
installation method:	<b>double glue</b>	

**PERFORMANCE + TESTING**

impact insulation class rating: 55-75

radiant panel: \*

nbs smoke density: <450

Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) When paired with the appropriate EcoWorx tile product results typically range from 55 –75, depending on subfloor assembly and EcoWorx tile product. For specific results, please contact your account manager.

Acoustical performance achieved when tested with EcoWorx carpet tile based on approved installation instructions.

**\* Must be tested in accordance with the approved installation instructions and EcoWorx® carpet tile.**