

Inlet


Coleção	Unite	
Número Do Produto	1026V	
Construção	Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	10 in w x 39 in l	25 cm w x 100 cm l
Dimensões Reais	9.84 in w x 39.37 in l	25.00 cm w x 100.00 cm l
Espessura Da Camada De Uso	22 mil (0.022 in)	0.56 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Loose Lay	
Adesivo Recomendado	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	26.91 sq ft	2.5 sq m
Peso Por Caixa	31.83 lbs	14.44 kg



Método De Instalação Recomendado

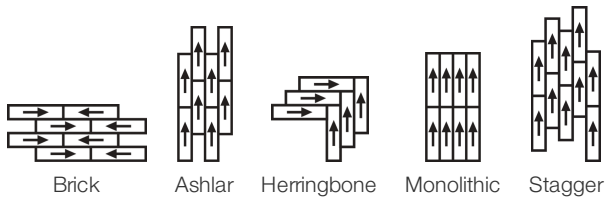

Produtos Coordenados

LVT: Inlet, Cove

Garantias

[15 Anos Comercial Limitada](#)

[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.9 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	FloorScore® Certified
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Nestle 26120	Spindle 26140 LRV 38.3 L* 68.26	Refuge 26155 LRV 20.9 L* 52.79	Beech 26502 LRV 36.8 L* 67.16	Shade 26506 LRV 29 L* 60.79	Thistle 26535 LRV 25.5 L* 57.58
					
Raw 26549 LRV 8.2 L* 34.3	Coarse 26595 LRV 14.5 L* 44.97	Thatch 26720 LRV 17.5 L* 48.89	Brew 26740 LRV 14.8 L* 45.36		

