

## Inlet


Coleção	<b>Unite</b>	
Número Do Produto	<b>1026V</b>	
Construção	<b>Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro</b>	
classe	<b>Class III, Type B</b>	
Acabamento	<b>ExoGuard®</b>	
	U.s.	Metric
Dimensões Nominais	<b>10 in w x 39 in l</b>	<b>25 cm w x 100 cm l</b>
Dimensões Reais	<b>9.84 in w x 39.37 in l</b>	<b>25.00 cm w x 100.00 cm l</b>
Espessura Da Camada De Uso	<b>22 mil (0.022 in)</b>	<b>0.56 mm</b>
Espessura Total Do Produto	<b>0.197 in</b>	<b>5 mm</b>
Perfil De Borda	<b>Borda Quadrada</b>	
Installation Type	<b>Loose Lay</b>	
Adesivo Recomendado	<b>, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or</b>	

## Empacotamento

Peças Por Caixa	<b>10 pcs</b>	
Área Por Caixa	<b>26.91 sq ft</b>	<b>2.5 sq m</b>
Peso Por Caixa	<b>31.83 lbs</b>	<b>14.44 kg</b>



## Método De Instalação Recomendado

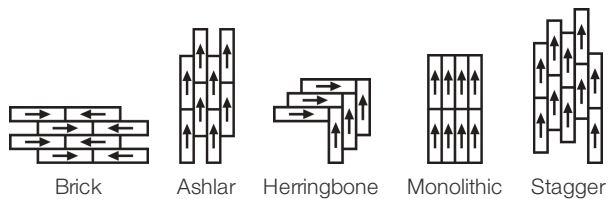

## Produtos Coordenados

LVT: Inlet, Cove

## Garantias

[Commercial 15 Year Underbed Bond Warranty](#)

[15 Anos Comercial Limitada](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.9 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	<b>FloorScore® Certified</b>
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Nestle 26120	Spindle 26140 LRV 38.3   L* 68.26	Refuge 26155 LRV 20.9   L* 52.79	Beech 26502 LRV 36.8   L* 67.16	Shade 26506 LRV 29   L* 60.79	Thistle 26535 LRV 25.5   L* 57.58
					
Raw 26549 LRV 8.2   L* 34.3	Coarse 26595 LRV 14.5   L* 44.97	Thatch 26720 LRV 17.5   L* 48.89	Brew 26740 LRV 14.8   L* 45.36		

