

## Cove


Collection	<b>Unite</b>	
Style Number	<b>1027V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile With Fiberglass</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard®</b>	
	U.S.	Metric
Nominal Dimensions	<b>10 in w x 39 in l</b>	<b>25 cm w x 100 cm l</b>
Actual Dimensions	<b>9.84 in w x 39.37 in l</b>	<b>25.00 cm w x 100.00 cm l</b>
Wear Layer Thickness	<b>22 mil (0.022 in)</b>	<b>0.56 mm</b>
Overall Thickness	<b>0.197 in</b>	<b>5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Loose Lay</b>	
Recommended Adhesive	<b>, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or</b>	

### Packaging

Pieces per Carton	<b>10 pcs</b>	
Area per Carton	<b>26.91 sq ft</b>	<b>2.5 sq m</b>
Weight per Carton	<b>31.83 lbs</b>	<b>14.44 kg</b>



### Recommended Installation Method

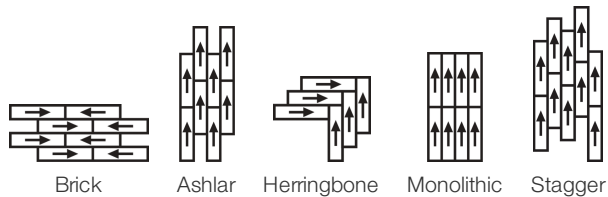

### Coordinating Products

LVT: Inlet, Cove

### Warranties

[Commercial 15 Year Underbed Bond Warranty](#)

[15 Year Commercial Limited Warranty](#)

### Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health &amp; Environmental Certifications

## Health &amp; Wellbeing

Indoor Air Quality

FloorScore® | Certified

## Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions

Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction

Part 1: Limit Hazardous Materials Optimization

**Absence of Heavy Metals**

X10 Volatile Compound Reduction

Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

**Absence of Halogenated Flame Retardants**

X10 Volatile Compound Reduction

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

**Ortho-Phthalates**

X11 Long Term Emissions Control

Part 2: Flooring Optimization

**FloorScore Certificate**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization

Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

EQ Credit: Low Emitting Materials

Option 1: Product Category Calculations

**FloorScore Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Plaster 27111

LRV 53.2 | L\* 77.99



Lure 27201

LRV 49.4 | L\* 75.67



Graze 27326

LRV 31.5 | L\* 62.9



Jade 27405

LRV 20.8 | L\* 52.74









Wash 27436

LRV 23.7 | L\* 55.77



Sapphire 27486

LRV 17.2 | L\* 48.51

					
Silt 27504 LRV 31.9   L* 63.25	Caster 27518 LRV 23.2   L* 55.33	Gesso 27520 LRV 35.6   L* 66.21	Pour 27530 LRV 21.9   L* 53.97	Cornerstone 27585 LRV 13.5   L* 43.45	Stoke 27855 LRV 19.7   L* 51.54

