

Cove


Collection	Unite	
Style Number	1027V	
Construction	Heavy Commercial Luxury Vinyl Tile With Fiberglass	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	10 in w x 39 in l	25 cm w x 100 cm l
Actual Dimensions	9.84 in w x 39.37 in l	25.00 cm w x 100.00 cm l
Wear Layer Thickness	22 mil (0.022 in)	0.56 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation Type	Loose Lay	
Recommended Adhesive	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	26.91 sq ft	2.5 sq m
Weight per Carton	31.83 lbs	14.44 kg



Recommended Installation Method

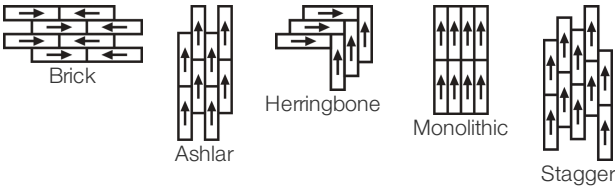

Coordinating Products

LVT: Inlet, Cove

Warranties

- [15 Year Commercial Limited Warranty](#)
- [Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Indoor Air Quality	FloorScore®   Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.9 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>FloorScore Certificate</b>

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>FloorScore Certified</b>
<a href="#">Installation Guidelines</a>	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.
<a href="#">Maintenance Guidelines</a>	

## Available Colorways



Plaster 27111  
LRV 53.2 | L\* 77.99



Lure 27201  
LRV 49.4 | L\* 75.67



Graze 27326  
LRV 31.5 | L\* 62.9



Jade 27405  
LRV 20.8 | L\* 52.74



Wash 27436  
LRV 23.7 | L\* 55.77



Sapphire 27486  
LRV 17.2 | L\* 48.51



Silt 27504  
LRV 31.9 | L\* 63.25



Caster 27518  
LRV 23.2 | L\* 55.33



Gesso 27520  
LRV 35.6 | L\* 66.21



Pour 27530  
LRV 21.9 | L\* 53.97



Cornerstone 27585  
LRV 13.5 | L\* 43.45



Stoke 27855  
LRV 19.7 | L\* 51.54

