

Cove

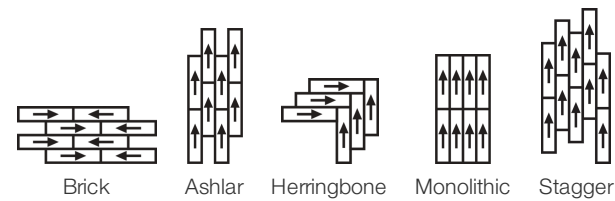
Collection	Unite	
Numéro Du Style	1027V	
Construction	Heavy Commercial Luxury Vinyl Tile With Fiberglass	
Classement	Class III, Type B	
Finition	ExoGuard®	
	U.s.	Metric
Dimensions Nominales	10 in w x 39 in l	25 cm w x 100 cm l
Dimensions Réelles	9.84 in w x 39.37 in l	25.00 cm w x 100.00 cm l
Épaisseur De La Couche d'Usure	22 mil (0.022 in)	0.56 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation Type	Loose Lay	
Adhésif Recommandé	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

Packaging

Pièces Par Carton	10 pcs	
Surface Par Carton	26.91 sq ft	2.5 sq m
Poids Par Carton	31.83 lbs	14.44 kg



Méthodes d'Installation Conseillées



Coordination Des Produits

LVT: Inlet

Garanties

[Limitée Commerciale De 15 Ans](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

Déclaration environnementale de produit (EPD)	Certifié Par Un Organisme Tiers Conformément Aux Normes ISO 14025, EN15804 & ISO 21930:2017
FloorScore®	Certifié
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
pays d'origine	South Korea

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Contribution À La Certification Leed

MR Credit: Building Product Disclosure and Optimisation Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.







Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.







This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Indice De Réflexion Lumineuse

					
Plaster 27111 LRV 53.2 L* 77.99	Lure 27201 LRV 49.4 L* 75.67	Graze 27326 LRV 31.5 L* 62.9	Jade 27405 LRV 20.8 L* 52.74	Wash 27436 LRV 23.7 L* 55.77	Sapphire 27486 LRV 17.2 L* 48.51

					
Silt 27504 LRV 31.9 L* 63.25	Caster 27518 LRV 23.2 L* 55.33	Gesso 27520 LRV 35.6 L* 66.21	Pour 27530 LRV 21.9 L* 53.97	Cornerstone 27585 LRV 13.5 L* 43.45	Stoke 27855 LRV 19.7 L* 51.54

