

Native Origins


Número Do Produto	0116V	
Construção	Vinílico De Luxo Em Régua (Lvt) Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	15 cm w x 122 cm l
Dimensões Reais	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Espessura Da Camada De Uso	12 mil (0.012 in)	0.3 mm
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	18 pcs	
Área Por Caixa	35.95 sq ft	3.34 sq m
Peso Por Caixa	30.42 lbs	13.8 kg



Método De Instalação Recomendado

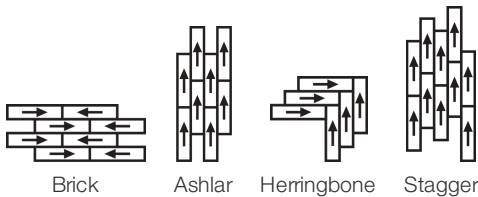

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	Passes	
resistência ao calor (ASTM F1514)	Passes	
resistência à luz (ASTM F1515)	Passes	
resistência a produtos químicos (ASTM F925)	Passes	
painel radiante (ASTM E648)	Passes, Class I	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)		

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[7 Year Light Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certificado](#)

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Life-Cycle Carbon Emissions
- Total Recycled Content

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)  
7.31 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[CE Marking \(EN 14041\) | Certificado 3rd Party](#)  
[Country of Origin | Imported](#)

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

Crédito De Contribuição

- MR Credit: Divulgação e otimização de produtos de construção
- Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)
- Crédito de EQ: Materiais de baixa emissão
- Opção 1: cálculos de categoria de produto

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

- [Installation Guidelines](#)
- [Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Bleached Oak 00140  
V2 - Slight Variation



Northern Maple 00200  
V2 - Slight Variation



Light Oak 00240  
V2 - Slight Variation



Golden Oak 00260  
V2 - Slight Variation



Natural Teak 00280  
V2 - Slight Variation



Rose Wood 00650  
V2 - Slight Variation



Bay Chestnut 00710  
V3 - Moderate Variation



Hand Hewn Figur 00722  
V2 - Slight Variation



Barnwood 00740  
V3 - Slight Variation



Black Forest 00780  
V3 - Moderate Variation



Cherry Wood 00840  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

