

Native Origins


Número Do Produto	0116V	
Construção	Vinílico De Luxo Em Régua (Lvt) Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	15 cm w x 122 cm l
Dimensões Reais	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Espessura Da Camada De Uso	12 mil (0.012 in)	0.3 mm
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	18 pcs	
Área Por Caixa	35.95 sq ft	3.34 sq m
Peso Por Caixa	30.42 lbs	13.8 kg



Método De Instalação Recomendado

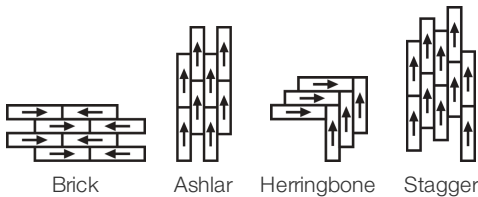

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	Passes	
resistência ao calor (ASTM F1514)	Passes	
resistência à luz (ASTM F1515)	Passes	
resistência a produtos químicos (ASTM F925)	Passes	
painel radiante (ASTM E648)	Passes, Class I	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[Comercial De 7 Anos Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

7.31 Kg CO₂/M²

Life-Cycle Carbon Emissions

Low Embodied Carbon

Embodied Carbon (Cradle to Gate)

7.31 Kg CO₂/M²

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certificado 3rd Party
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

Absence of Heavy Metals

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

Absence of Halogenated Flame Retardants

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

Ortho-Phthalates

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

FloorScore® Certified

Crédito de EQ: Materiais de baixa emissão

Opção 1: cálculos de categoria de produto

[Installation Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Bleached Oak 00140 V2 - Slight Variation	Northern Maple 00200 V2 - Slight Variation	Light Oak 00240 V2 - Slight Variation	Golden Oak 00260 V2 - Slight Variation	Natural Teak 00280 V2 - Slight Variation	Rose Wood 00650 V2 - Slight Variation
					
Bay Chestnut 00710 V3 - Moderate Variation	Hand Hewn Figur 00722 V2 - Slight Variation	Barnwood 00740 V2 - Slight Variation	Black Forest 00780 V3 - Moderate Variation	Cherry Wood 00840 V2 - Slight Variation	

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

