

Native Origins


Número Do Produto	0116V	
Construção	Vinílico De Luxo Em Régua (Lvt) Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	15 cm w x 122 cm l
Dimensões Reais	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Espessura Da Camada De Uso	12 mil (0.012 in)	0.3 mm
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	18 pcs	
Área Por Caixa	35.95 sq ft	3.34 sq m
Peso Por Caixa	30.42 lbs	13.8 kg



Método De Instalação Recomendado

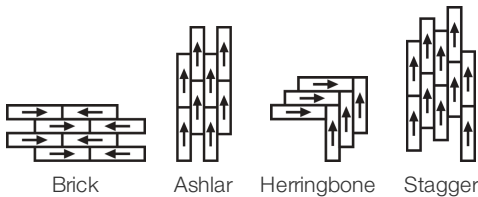

Desempenho + Teste

Recuo Residual (Astm F1914)	Passes
Resistência Ao Calor (Astm F1514)	Passes
Resistência À Luz (Astm F1515)	Passes
Resistência A Produtos Químicos (Astm F925)	Passes
Coefficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[Comercial De 7 Anos Limitada](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificações

Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	7.31 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	FloorScore® Certificado
	CE Marking (EN 14041) Certificado 3rd Party
	Country of Origin Imported

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	FloorScore Certified
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Bleached Oak 00140 V2 - Slight Variation	Northern Maple 00200 V2 - Slight Variation	Light Oak 00240 V2 - Slight Variation	Golden Oak 00260 V2 - Slight Variation	Natural Teak 00280 V2 - Slight Variation	Rose Wood 00650 V2 - Slight Variation

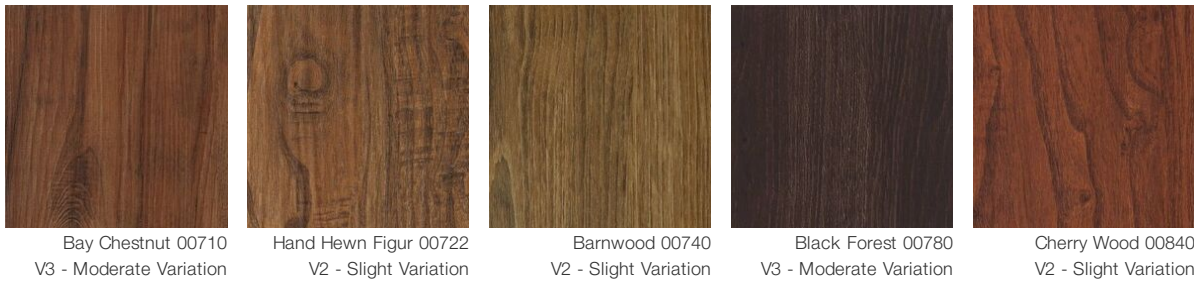

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

