

Uncommon Ground 4"


| | | |
|----------------------|---|--------------------------------|
| Collection | Uncommon Ground | |
| Style Number | 0187V | |
| Construction | Heavy Commercial Luxury Vinyl Tile | |
| Class / ASTM F1700 | Class III, Type B | |
| Finish | ExoGuard® | |
| | U.S. | Metric |
| Nominal Dimensions | 4 in w x 36 in l | 10 cm w x 92 cm l |
| Actual Dimensions | 3.94 in w x 36.22 in l | 10.01 cm w x 92.00 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Thickness | 0.118 in | 3 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |



Packaging

| | | |
|-------------------|--------------------|------------------|
| Pieces per Carton | 36 pcs | |
| Area per Carton | 35.65 sq ft | 3.31 sq m |
| Weight per Carton | 41.5 lbs | 18.82 kg |

Recommended Installation Method

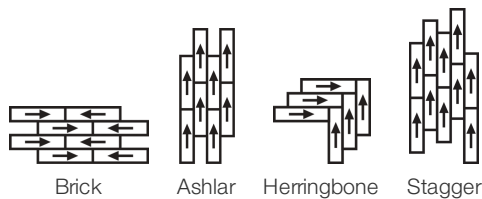

Coordinating Products

LVT: Uncommon Ground 6"

Performance + Testing

| | | |
|-------------------------------------|-------------------------------------|--|
| Static Load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914) | Passes | |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)
[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

| | |
|---|--|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 6.05 Kg CO ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | GSA Approved |
| | CE Marking (EN 14041) 3rd Party Certified |
| | Country of Origin Imported |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization | Absence of Halogenated Flame Retardants |
| X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization | FloorScore Certificate |

Leed v4 Contribution Credits

| | |
|---|---|
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | FloorScore Certified |

























[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.





Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Provence 02140 V2 - Slight Variation | Driftwood 02150 V2 - Slight Variation | Sand Dune 02160 V2 - Slight Variation | Gallery Maple 02200 V2 - Slight Variation | French Grey 02500 V3 - Moderate Variation | White Oak 02506 V2 - Slight Variation |
|  |  |  |  |  |  |
| Zen 02520 V1 - Uniform Appearance | Teak Light 02530 V3 - Moderate Variation | Brazilian Chry 02534 V3 - Moderate Variation | Telluride 02540 V4 - Substantial Variation | Teak Green 02544 V2 - Slight Variation | Skyline 02560 V2 - Slight Variation |
|  |  |  |  |  |  |
| Cikel Cherry 02571 V2 - Slight Variation | Asian Mahogany 02572 V2 - Slight Variation | Chocolate Chry 02573 V2 - Slight Variation | Whiskey Barrel 02580 V2 - Slight Variation | Olivewood 02700 V3 - Moderate Variation | Bamboo Natural 02701 V2 - Slight Variation |
|  |  |  |  |  |  |
| Bamboo Coffee 02702 V2 - Slight Variation | Heritage 02710 V2 - Slight Variation | Adirondack 02720 V2 - Slight Variation | Gallery Walnut 02740 V3 - Moderate Variation | Colonial 02750 V2 - Slight Variation | Ceylon 02760 V2 - Slight Variation |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

| | | | |
|---|--|---|---|
| V1 | V2 | V3 | V4 |
|  |  |  |  |
| Uniform Appearance | Slight Variation | Moderate Variation | Substantial Variation |

