

Uncommon Ground 4"


Collection	Uncommon Ground	
Style Number	0187V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	4 in w x 36 in l	10 cm w x 92 cm l
Actual Dimensions	3.94 in w x 36.22 in l	10.01 cm w x 92.00 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.118 in	3 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces per Carton	36 pcs	
Area per Carton	35.65 sq ft	3.31 sq m
Weight per Carton	41.5 lbs	18.82 kg



Recommended Installation Method

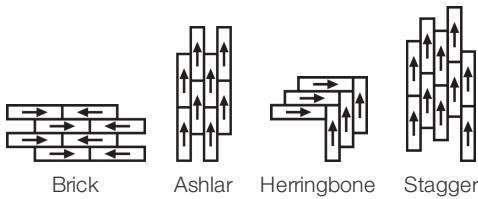

Coordinating Products

LVT: Uncommon Ground 6"

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)  
[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certified](#)

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

GSA | Approved  
CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition  
  
X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
  
X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization  
  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**Absence of Asbestos**  
  
**Absence of Heavy Metals**  
  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
  
**FloorScore Certificate**

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways




Provence 02140  
V2 - Slight Variation



Driftwood 02150  
V2 - Slight Variation



Sand Dune 02160  
V2 - Slight Variation



Gallery Maple 02200  
V2 - Slight Variation



French Grey 02500  
V3 - Moderate Variation



White Oak 02506  
V2 - Slight Variation



Zen 02520  
V1 - Uniform Appearance



Teak Light 02530  
V3 - Moderate Variation



Brazilian Chry 02534  
V3 - Moderate Variation



Telluride 02540  
V4 - Substantial Variation



Teak Green 02544  
V2 - Slight Variation



Skyline 02560  
V2 - Slight Variation




Cikel Cherry 02571  
V2 - Slight Variation



Asian Mahogany 02572  
V2 - Slight Variation



Chocolate Chry 02573  
V2 - Slight Variation



Whiskey Barrel 02580  
V2 - Slight Variation



Olivewood 02700  
V3 - Moderate Variation



Bamboo Natural 02701  
V2 - Slight Variation



Bamboo Coffee 02702  
V2 - Slight Variation



Heritage 02710  
V2 - Slight Variation



Adirondack 02720  
V2 - Slight Variation



Gallery Walnut 02740  
V3 - Moderate Variation



Colonial 02750  
V2 - Slight Variation



Ceylon 02760  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

