

Uncommon Ground 4"


Colección	Uncommon Ground	
Número De Estilo	0187V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	4 in w x 36 in l	10 cm w x 92 cm l
Dimensiones Reales	3.94 in w x 36.22 in l	10.01 cm w x 92.00 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.118 in	3 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	



Embalaje

Piezas Por Caja	36 pcs	
Área Por Caja	35.65 sq ft	3.31 sq m
Peso Por Caja	41.5 lbs	18.82 kg

Método De Instalación Recomendado

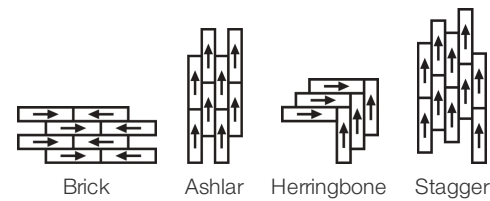

Productos Que Combinan

LVT: Uncommon Ground 6"

desempeño + pruebas

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	Passes	
resistencia al calor (ASTM F1514)	Passes	
resistencia a la luz (ASTM F1515)	Passes	
resistencia a productos químicos (ASTM F925)	Passes	
panel radiante (ASTM E648)	Passes, Class I	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[15 Años Limitado A Uso Comercial](#)
[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	6.05 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Low Embodied Carbon
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	CE Marking (EN 14041) Certificado Tercerizado
	Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate
























Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales	Health Product Declaration (HPD) 100 Ppm Disclosure
Crédito MR: Divulgación y optimización de productos de construcción Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de categoría de producto	FloorScore® Certified

[Installation Guidelines](#)
[Maintenance Guidelines](#)




Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
Visit shawcontract.com/testing for more information.

Available Colorways

					
Provence 02140 V2 - Slight Variation	Driftwood 02150 V2 - Slight Variation	Sand Dune 02160 V2 - Slight Variation	Gallery Maple 02200 V2 - Slight Variation	French Grey 02500 V3 - Moderate Variation	White Oak 02506 V2 - Slight Variation
					
Zen 02520 V1 - Uniform Appearance	Teak Light 02530 V3 - Moderate Variation	Brazilian Chry 02534 V3 - Moderate Variation	Telluride 02540 V4 - Substantial Variation	Teak Green 02544 V2 - Slight Variation	Skyline 02560 V2 - Slight Variation
					
Cikel Cherry 02571 V2 - Slight Variation	Asian Mahogany 02572 V2 - Slight Variation	Chocolate Chry 02573 V2 - Slight Variation	Whiskey Barrel 02580 V2 - Slight Variation	Olivewood 02700 V3 - Moderate Variation	Bamboo Natural 02701 V2 - Slight Variation
					
Bamboo Coffee 02702 V2 - Slight Variation	Heritage 02710 V2 - Slight Variation	Adirondack 02720 V2 - Slight Variation	Gallery Walnut 02740 V3 - Moderate Variation	Colonial 02750 V2 - Slight Variation	Ceylon 02760 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1	V2	V3	V4
			
Uniform Appearance	Slight Variation	Moderate Variation	Substantial Variation

