

Uncommon Ground 4"


Collection	Uncommon Ground	
Numéro De Style	0187V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard®	
	Impérial	Métrique
Dimensions Nominales	4 in w x 36 in l	10 cm w x 92 cm l
Dimensions Réelles	3.94 in w x 36.22 in l	10.01 cm w x 92.00 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.118 in	3 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	36 pcs	
Surface Par Carton	35.65 sq ft	3.31 sq m
Poids Par Carton	41.5 lbs	18.82 kg

Méthodes d'Installation Conseillées

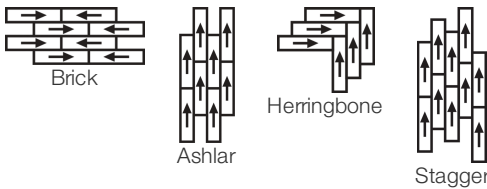

Coordination Des Produits

LVT: Uncommon Ground 6"

performance + Tests et essai

charge statique (ASTM F970)	Passes (Modified), *1500 lbs
poinçonnement rémanent (ASTM F1914)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Limitée Commerciale De 15 Ans](#)

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Agréé

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Life-Cycle Carbon Emissions
Total Recycled Content

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025,
EN 15804 Et ISO 21930:2017
6.05 Kg CO₂/M²
Low Embodied Carbon
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants
Ortho-Phthalates
FloorScore Certificate

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgence et optimisation des produits de construction
« Crédit MR : Divulgence et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways




Provence 02140
V2 - Slight Variation



Driftwood 02150
V2 - Slight Variation




Sand Dune 02160
V2 - Slight Variation



Gallery Maple 02200
V2 - Slight Variation



French Grey 02500
V3 - Moderate Variation



White Oak 02506
V2 - Slight Variation



Zen 02520
V1 - Uniform Appearance



Teak Light 02530
V3 - Moderate Variation



Brazilian Chry 02534
V3 - Moderate Variation



Telluride 02540
V4 - Substantial Variation



Teak Green 02544
V2 - Slight Variation



Skyline 02560
V2 - Slight Variation




Cikel Cherry 02571
V2 - Slight Variation



Asian Mahogany 02572
V2 - Slight Variation



Chocolate Chry 02573
V2 - Slight Variation



Whiskey Barrel 02580
V2 - Slight Variation



Olivewood 02700
V3 - Moderate Variation



Bamboo Natural 02701
V2 - Slight Variation



Bamboo Coffee 02702
V2 - Slight Variation



Heritage 02710
V2 - Slight Variation



Adirondack 02720
V2 - Slight Variation



Gallery Walnut 02740
V3 - Moderate Variation



Colonial 02750
V2 - Slight Variation



Ceylon 02760
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

