

Uncommon Ground 4"


Coleção	Uncommon Ground	
Número Do Produto	0187V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	4 in w x 36 in l	10 cm w x 92 cm l
Dimensões Reais	3.94 in w x 36.22 in l	10.01 cm w x 92.00 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.118 in	3 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	



Empacotamento

Peças Por Caixa	36 pcs	
Área Por Caixa	35.65 sq ft	3.31 sq m
Peso Por Caixa	41.5 lbs	18.82 kg

Método De Instalação Recomendado

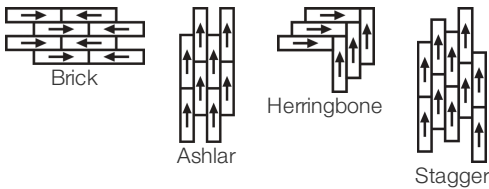

Produtos Coordenados

LVT: Uncommon Ground 6"

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs
recuo residual (ASTM F1914)	Passes
resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
painel radiante (ASTM E648)	Passes, Class I

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)
[15 Anos Comercial Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency
 Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)
[FloorScore® | Certificado](#)

Climate Impact

Environmental Product Declaration (EPD)
 Embodied Carbon (Cradle to Gate)
 Life-Cycle Carbon Emissions
 Total Recycled Content

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)
 6.05 Kg CO₂/M²
 Low Embodied Carbon
 0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certificado 3rd Party
 Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
 Ingredientes materiais - Opção 1: Relatório de ingredientes materiais
 MR Credit: Divulgação e otimização de produtos de construção
 Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)
 Crédito de EQ: Materiais de baixa emissão
 Opção 1: cálculos de categoria de produto

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified

























[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
 Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Provence 02140 V2 - Slight Variation	Driftwood 02150 V2 - Slight Variation	Sand Dune 02160 V2 - Slight Variation	Gallery Maple 02200 V2 - Slight Variation	French Grey 02500 V3 - Moderate Variation	White Oak 02506 V2 - Slight Variation
					
Zen 02520 V1 - Uniform Appearance	Teak Light 02530 V3 - Moderate Variation	Brazilian Chry 02534 V3 - Moderate Variation	Telluride 02540 V4 - Substantial Variation	Teak Green 02544 V2 - Slight Variation	Skyline 02560 V2 - Slight Variation
					
Cikel Cherry 02571 V2 - Slight Variation	Asian Mahogany 02572 V2 - Slight Variation	Chocolate Chry 02573 V2 - Slight Variation	Whiskey Barrel 02580 V2 - Slight Variation	Olivewood 02700 V3 - Moderate Variation	Bamboo Natural 02701 V2 - Slight Variation
					
Bamboo Coffee 02702 V2 - Slight Variation	Heritage 02710 V2 - Slight Variation	Adirondack 02720 V2 - Slight Variation	Gallery Walnut 02740 V3 - Moderate Variation	Colonial 02750 V2 - Slight Variation	Ceylon 02760 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1 	V2 	V3 	V4 
Uniform Appearance	Slight Variation	Moderate Variation	Substantial Variation

