

Uncommon Ground 6"


Colección	Uncommon Ground	
Número De Estilo	0188V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	6 in w x 36 in l	15 cm w x 92 cm l
Dimensiones Reales	5.91 in w x 36.22 in l	15.01 cm w x 92.00 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.118 in	3 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	24 pcs	
Área Por Caja	35.65 sq ft	3.31 sq m
Peso Por Caja	41.5 lbs	18.82 kg



Método De Instalación Recomendado

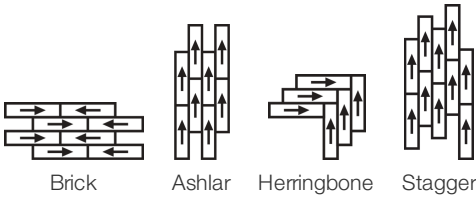

Productos Que Combinan

LVT: Uncommon Ground 4"

desempeño + pruebas

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	<b>Passes</b>	
resistencia al calor (ASTM F1514)	<b>Passes</b>	
resistencia a la luz (ASTM F1515)	<b>Passes</b>	
resistencia a productos químicos (ASTM F925)	<b>Passes</b>	
panel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)  
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	6.05 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Low Embodied Carbon
Embodied Carbon (Cradle to Gate)	6.05 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041)   Certificado Tercerizado
	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

## Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción  
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión  
Opción 1: Cálculos de categoría de producto

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**


**FloorScore® Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Provence 02140  
LRV 33.9 | L\* 64.91  
V2 - Slight Variation




Driftwood 02150  
V2 - Slight Variation



Sand Dune 02160  
V2 - Slight Variation



Gallery Maple 02200  
V2 - Slight Variation




French Grey 02500  
LRV 19.1 | L\* 50.82  
V3 - Moderate Variation




White Oak 02506  
V2 - Slight Variation



Zen 02520  
V2 - Slight Variation



Teak Light 02530  
V3 - Moderate Variation




Brazilian Chry 02534  
V3 - Moderate Variation




Telluride 02540  
V4 - Substantial Variation




Teak Green 02544  
V2 - Slight Variation




Skyline 02560  
V2 - Slight Variation



Cikel Cherry 02571  
V2 - Slight Variation




Asian Mahogany 02572  
V2 - Slight Variation



Chocolate Chry 02573  
V2 - Slight Variation



Whiskey Barrel 02580  
V2 - Slight Variation



Olivewood 02700  
V3 - Moderate Variation



Bamboo Natural 02701  
V2 - Slight Variation



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

