

## Uncommon Ground 6"


Collection	<b>Uncommon Ground</b>	
Numéro De Style	<b>0188V</b>	
Construction	<b>Carreau De Vinyle De Luxe Commercial Lourd</b>	
classe	<b>Class III, Type B</b>	
Finition	<b>ExoGuard®</b>	
	Impérial	Métrique
Dimensions Nominales	<b>6 in w x 36 in l</b>	<b>15 cm w x 92 cm l</b>
Dimensions Réelles	<b>5.91 in w x 36.22 in l</b>	<b>15.01 cm w x 92.00 cm l</b>
Épaisseur De La Couche d'Usure	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Épaisseur Générale Du Produit	<b>0.118 in</b>	<b>3 mm</b>
Profil Du Bord	<b>Bord Carré</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Adhésif Recommandé	<b>S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon</b>	



### Emballage

Pièces Par Carton	<b>24 pcs</b>	
Surface Par Carton	<b>35.65 sq ft</b>	<b>3.31 sq m</b>
Poids Par Carton	<b>41.5 lbs</b>	<b>18.82 kg</b>

### Méthodes d'Installation Conseillées

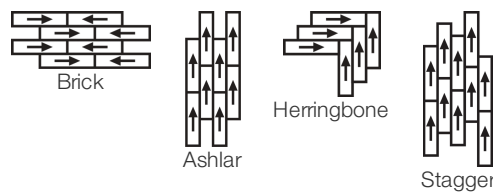

### Coordination Des Produits

LVT: Uncommon Ground 4"

### performance + Tests et essai

charge statique (ASTM F970)  
 poinçonnement rémanent (ASTM F1914)  
 résistance à la chaleur (ASTM F1514)  
 résistance à la lumière (ASTM F1515)  
 résistance chimique (ASTM F925)  
 Essai au panneau radiant (Astm E648)  
 coefficient de frottement (ASTM D2407,  
 résistance au glissement)

**Passes (Modified), \*1500 lbs**

**Passes**

**Passes**

**Passes**

**Passes**

**Passes, Class I**

**>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes**

\*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garanties

[Limitée Commerciale De 15 Ans](#)

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

### Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Agréé

### Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt  
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt  
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt  
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
**Ortho-Phthalates**  
**FloorScore Certificate**

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulgence et optimisation des produits de construction  
« Crédit MR : Divulgence et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)

[Maintenance Guidelines](#)






**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

 <div>Provence 02140 LRV 33.9   L* 64.91 V2 - Slight Variation</div>	 <div>Driftwood 02150 V2 - Slight Variation</div>	 <div>Sand Dune 02160 V2 - Slight Variation</div>	 <div>Gallery Maple 02200 V2 - Slight Variation</div>	 <div>French Grey 02500 LRV 19.1   L* 50.82 V3 - Moderate Variation</div>	 <div>White Oak 02506 V2 - Slight Variation</div>
 <div>Zen 02520 V2 - Slight Variation</div>	 <div>Teak Light 02530 V3 - Moderate Variation</div>	 <div>Brazilian Chry 02534 V3 - Moderate Variation</div>	 <div>Telluride 02540 V4 - Substantial Variation</div>	 <div>Teak Green 02544 V2 - Slight Variation</div>	 <div>Skyline 02560 V2 - Slight Variation</div>
 <div>Cikel Cherry 02571 V2 - Slight Variation</div>	 <div>Asian Mahogany 02572 V2 - Slight Variation</div>	 <div>Chocolate Chry 02573 V2 - Slight Variation</div>	 <div>Whiskey Barrel 02580 V2 - Slight Variation</div>	 <div>Olivewood 02700 V3 - Moderate Variation</div>	 <div>Bamboo Natural 02701 V2 - Slight Variation</div>
 <div>Bamboo Coffee 02702 V2 - Slight Variation</div>	 <div>Heritage 02710 V2 - Slight Variation</div>	 <div>Adirondack 02720 LRV 10.2   L* 38.27 V2 - Slight Variation</div>	 <div>Gallery Walnut 02740 V3 - Moderate Variation</div>	 <div>Colonial 02750 V2 - Slight Variation</div>	 <div>Ceylon 02760 V2 - Slight Variation</div>

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



