


Uncommon Ground 6"

Coleção	Uncommon Ground	
Número Do Produto	0188V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 36 in l	15 cm w x 92 cm l
Dimensões Reais	5.91 in w x 36.22 in l	15.01 cm w x 92.00 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.118 in	3 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	24 pcs	
Área Por Caixa	35.65 sq ft	3.31 sq m
Peso Por Caixa	41.5 lbs	18.82 kg

Método De Instalação Recomendado

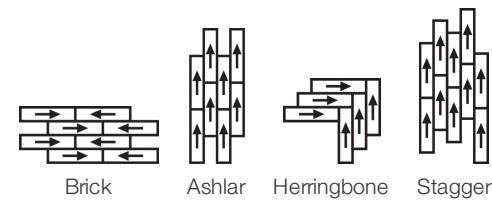

Produtos Coordenados

LVT: Uncommon Ground 4"



desempenho + teste

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	<b>Passes</b>	
resistência ao calor (ASTM F1514)	<b>Passes</b>	
resistência à luz (ASTM F1515)	<b>Passes</b>	
resistência a produtos químicos (ASTM F925)	<b>Passes</b>	
painel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	6.05 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Low Embodied Carbon
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041)   Certificado 3rd Party
	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore® Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

 <p>Provence 02140 LRV 33.9   L* 64.91 V2 - Slight Variation</p>	 <p>Driftwood 02150 V2 - Slight Variation</p>	 <p>Sand Dune 02160 V2 - Slight Variation</p>	 <p>Gallery Maple 02200 V2 - Slight Variation</p>	 <p>French Grey 02500 LRV 19.1   L* 50.82 V3 - Moderate Variation</p>	 <p>White Oak 02506 V2 - Slight Variation</p>
 <p>Zen 02520 V2 - Slight Variation</p>	 <p>Teak Light 02530 V3 - Moderate Variation</p>	 <p>Brazilian Chry 02534 V3 - Moderate Variation</p>	 <p>Telluride 02540 V4 - Substantial Variation</p>	 <p>Teak Green 02544 V2 - Slight Variation</p>	 <p>Skyline 02560 V2 - Slight Variation</p>
 <p>Cikel Cherry 02571 V2 - Slight Variation</p>	 <p>Asian Mahogany 02572 V2 - Slight Variation</p>	 <p>Chocolate Chry 02573 V2 - Slight Variation</p>	 <p>Whiskey Barrel 02580 V2 - Slight Variation</p>	 <p>Olivewood 02700 V3 - Moderate Variation</p>	 <p>Bamboo Natural 02701 V2 - Slight Variation</p>



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

