


Uncommon Ground 6"


Coleção	Uncommon Ground	
Número Do Produto	0188V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 36 in l	15 cm w x 92 cm l
Dimensões Reais	5.91 in w x 36.22 in l	15.01 cm w x 92.00 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.118 in	3 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

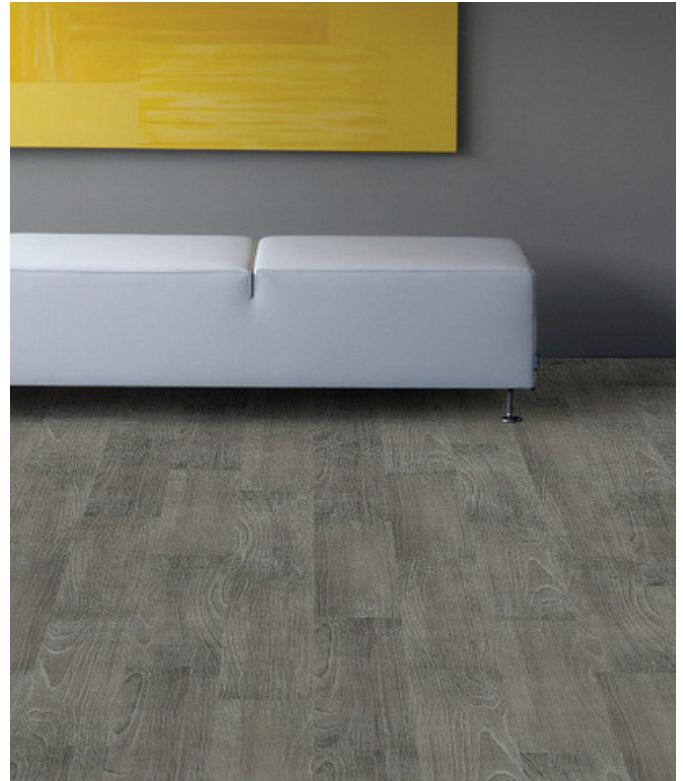

Empacotamento

Peças Por Caixa	24 pcs	
Área Por Caixa	35.65 sq ft	3.31 sq m
Peso Por Caixa	41.5 lbs	18.82 kg

Método De Instalação Recomendado

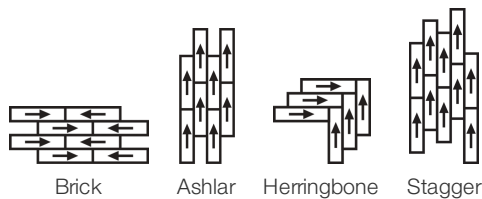

Produtos Coordenados

LVT: Uncommon Ground 4"

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	Passes	
resistência ao calor (ASTM F1514)	Passes	
resistência à luz (ASTM F1515)	Passes	
resistência a produtos químicos (ASTM F925)	Passes	
painel radiante (ASTM E648)	Passes, Class I	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantias

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)
[15 Anos Comercial Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	6.05 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Low Embodied Carbon
Embodied Carbon (Cradle to Gate)	6.05 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	CE Marking (EN 14041) Certificado 3rd Party Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão
Opção 1: cálculos de categoria de produto

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore® Certified


Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways




Provence 02140
LRV 33.9 | L* 64.91
V2 - Slight Variation




Driftwood 02150
V2 - Slight Variation




Sand Dune 02160
V2 - Slight Variation



Gallery Maple 02200
V2 - Slight Variation




French Grey 02500
LRV 19.1 | L* 50.82
V3 - Moderate Variation




White Oak 02506
V2 - Slight Variation




Zen 02520
V2 - Slight Variation



Teak Light 02530
V3 - Moderate Variation




Brazilian Chry 02534
V3 - Moderate Variation




Telluride 02540
V4 - Substantial Variation




Teak Green 02544
V2 - Slight Variation




Skyline 02560
V2 - Slight Variation



Cikel Cherry 02571
V2 - Slight Variation




Asian Mahogany 02572
V2 - Slight Variation



Chocolate Chry 02573
V2 - Slight Variation



Whiskey Barrel 02580
V2 - Slight Variation



Olivewood 02700
V3 - Moderate Variation



Bamboo Natural 02701
V2 - Slight Variation



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

