


Jeogori

| | | |
|----------------------|--|-------------------------|
| Collection | Crete + Jeogori | |
| Style Number | 0215V | |
| Construction | Heavy Commercial Luxury Vinyl Tile | |
| Class / ASTM F1700 | Class III, Type B | |
| Finish | ExoGuard® | |
| | U.S. | Metric |
| Nominal Dimensions | 18 in w x 18 in l | 45 cm w x 45 cm l |
| Actual Dimensions | 17.72 in w x 17.72 in l | 45.01 cm w x 45.01 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Thickness | 0.118 in | 3 mm |
| Edge Profile | Micro-Bevel | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|-------------------|-------------|-----------|
| Pieces per Carton | 16 pcs | |
| Area per Carton | 34.88 sq ft | 3.24 sq m |
| Weight per Carton | 43.43 lbs | 19.7 kg |

Recommended Installation Method

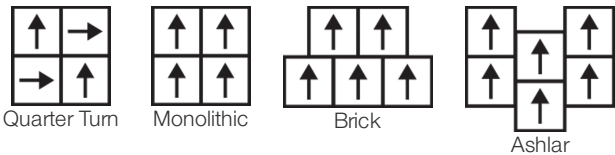

Coordinating Products

LVT: Crete

Performance + Testing

| | | |
|--|---|--|
| Static Load (ASTM F970) | Passes (Modified), *2000 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914) | Passes | |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes | |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | | |

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)
[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)
[FloorScore® | Certified](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Life-Cycle Carbon Emissions
Total Recycled Content

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)
6.05 Kg CO₂/M²
Low Embodied Carbon
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control
Part 2: Flooring Optimization

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Canvas 90100
V1 - Uniform Appearance



Muslin 90120
V1 - Uniform Appearance



Burlap 90130
V1 - Uniform Appearance



Linen 90500
V1 - Uniform Appearance



Black Tie 90590
V1 - Uniform Appearance



Flax 90700
V1 - Uniform Appearance



Fiber 90720
V1 - Uniform Appearance



Jute 90790
V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation