


Jeogori

|                            |  |                         |
|----------------------------|--|-------------------------|
| Coleção                    | Crete + Jeogori  |                         |
| Número Do Produto          | 0215V  |                         |
| Construção                 | Heavy Commercial Luxury Vinyl Tile   |                         |
| classe                     | Class III, Type B  |                         |
| Acabamento                 | ExoGuard®  |                         |
|                            | U.s.   | Metric                  |
| Dimensões Nominais         | 18 in w x 18 in l  | 45 cm w x 45 cm l       |
| Dimensões Reais            | 17.72 in w x 17.72 in l  | 45.01 cm w x 45.01 cm l |
| Espessura Da Camada De Uso | 20 mil (0.02 in)   | 0.51 mm                 |
| Espessura Total Do Produto | 0.118 in   | 3 mm                    |
| Perfil De Borda            | Micro-Chanfrado  |                         |
| Installation Type          | Dry Back   |                         |
| Instalação                 | Direct Glue  |                         |
| Adesivo Recomendado        | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon |                         |

Empacotamento

|                 |             |           |
|-----------------|-------------|-----------|
| Peças Por Caixa | 16 pcs      |           |
| Área Por Caixa  | 34.88 sq ft | 3.24 sq m |
| Peso Por Caixa  | 43.43 lbs   | 19.7 kg   |

Método De Instalação Recomendado

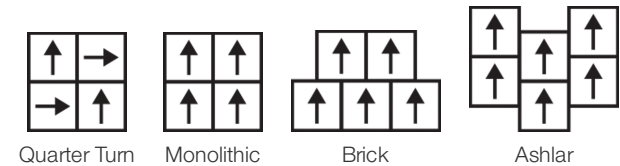

Produtos Coordenados

LVT: Crete

desempenho + teste

|   |   |
|---|---|
| recuo residual (ASTM F1914)                                     | Passes  |
| resistência ao calor (ASTM F1514)                               | Passes  |
| resistência à luz (ASTM F1515)                                  | Passes  |
| resistência a produtos químicos (ASTM F925)                     | Passes  |
| painel radiante (ASTM E648)                                     | Passes, Class I   |
| coeficiente de atrito (ASTM D2407, resistência ao deslizamento) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.



## Garantias

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Anos Comercial Limitada](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Atributos + Certificações

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certificado](#)

## Climate Impact

Environmental Product Declaration (EPD)

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)

Embodied Carbon (Cradle to Gate)

6.05 Kg CO<sub>2</sub>/M<sup>2</sup>

Life-Cycle Carbon Emissions

Low Embodied Carbon

Embodied Carbon (Cradle to Gate)

6.05 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

[CE Marking \(EN 14041\) | Certificado 3rd Party](#)  
[Country of Origin | Imported](#)

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

**Absence of Heavy Metals**

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

**Absence of Halogenated Flame Retardants**

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

**Ortho-Phthalates**

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**FloorScore Certificate**

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

**FloorScore® Certified**

[Installation Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.



Available Colorways



Canvas 90100  
V1 - Uniform Appearance



Muslin 90120  
V1 - Uniform Appearance



Burlap 90130  
V1 - Uniform Appearance



Linen 90500  
V1 - Uniform Appearance



Black Tie 90590  
V1 - Uniform Appearance



Flax 90700  
V1 - Uniform Appearance



Fiber 90720  
V1 - Uniform Appearance



Jute 90790  
V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation