


Crete

Collection	Crete + Jeogori	
Numéro De Style	0203V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard®	
Dimensions Nominales	Impérial	Métrique
	18 in w x 18 in l	45 cm w x 45 cm l
	17.72 in w x 17.72 in l	45.01 cm w x 45.01 cm l
	20 mil (0.02 in)	0.51 mm
	0.118 in	3 mm
	Bord Carré	
	Dry Back	
Installation Type	Direct Glue	
Installation	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	
Adhésif Recommandé		

Emballage

Pièces Par Carton	16 pcs	
Surface Par Carton	34.88 sq ft	3.24 sq m
Poids Par Carton	39 lbs	17.69 kg

Méthodes d'Installation Conseillées

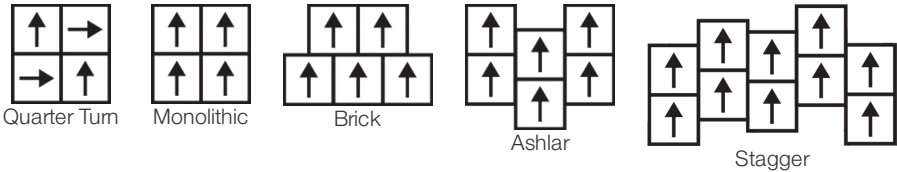

Coordination Des Produits

LVT: Jeogori

performance + Tests et essai

poinçonnement rémanent (ASTM F1914)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garanties

[Limitée Commerciale De 15 Ans](#)

[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

### Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Agréé

### Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt  
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt  
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt  
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt  
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction  
« Crédit MR : Divulgation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)

[Maintenance Guidelines](#)


**Health Product Declaration (HPD) | 1000 Ppm Disclosure**  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways




Vapor 03140  
V2 - Slight Variation




Buckskin 03250  
V2 - Slight Variation




Viridian 03390  
V2 - Slight Variation




Smoke 03510  
V2 - Slight Variation




Industrial 03520  
V2 - Slight Variation




Cinder 03570  
V2 - Slight Variation




Zinc 03590  
V2 - Slight Variation




Sunset 03620  
V2 - Slight Variation




Mesa 03650  
V2 - Slight Variation



Haze 03720  
V2 - Slight Variation



Slate 03750  
V2 - Slight Variation



Leather 03770  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

