


Strand

Collection	Surface + Strand	
Style Number	0516V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard®	
	U.s.	Metric
Nominal Dimensions	18 in w x 36 in l	46 cm w x 91 cm l
Actual Dimensions	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces Per Carton	10 pcs	
Area Per Carton	45 sq ft	4.18 sq m
Weight Per Carton	37.65 lbs	17.08 kg

Recommended Installation Method

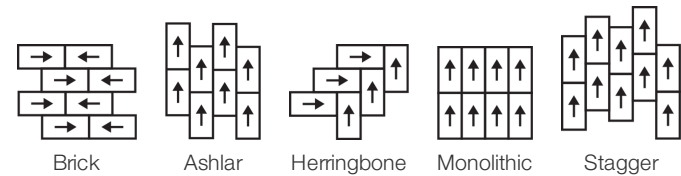

Coordinating Products

LVT: Surface

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Year Commercial Limited](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health &amp; Environmental Certifications

## Health &amp; Wellbeing

Material Ingredient Transparency  
 Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
 FloorScore® | Certified

## Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Life-Cycle Carbon Emissions

Low Embodied Carbon

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified  
 Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

**Absence of Heavy Metals**

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

**Absence of Halogenated Flame Retardants**

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

**Ortho-Phthalates**

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**FloorScore Certificate**

## Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
 Material Ingredients - Option 1: Material Ingredient Reporting

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

MR Credit: Building Product Disclosure and Optimization  
 Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

EQ Credit: Low Emitting Materials  
 Option 1: Product Category Calculations

**FloorScore® Certified**







[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
 Specifications are subject to nominal manufacturing variance. Material supply  
 and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of  
 this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Wool 16115 LRV 38   L* 68.01 V2 - Slight Variation	Chalk 16515 LRV 58.4   L* 80.95 V2 - Slight Variation	Dune 16516 LRV 36.9   L* 67.19 V2 - Slight Variation	Pebble 16530 LRV 16.7   L* 47.87 V2 - Slight Variation	Silt 16595 LRV 9.8   L* 37.42 V2 - Slight Variation	Clay 16761 LRV 22.8   L* 54.91 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation

