

Strand


|                      |  |                         |
|----------------------|--|-------------------------|
| Collection           | Surface + Strand   |                         |
| Style Number         | 0516V  |                         |
| Construction         | Heavy Commercial Luxury Vinyl Tile   |                         |
| Class / ASTM F1700   | Class III, Type B  |                         |
| Finish               | ExoGuard®  |                         |
|                      | U.S.   | Metric                  |
| Nominal Dimensions   | 18 in w x 36 in l  | 46 cm w x 91 cm l       |
| Actual Dimensions    | 18.00 in w x 36.00 in l  | 45.72 cm w x 91.44 cm l |
| Wear Layer Thickness | 20 mil (0.02 in)   | 0.51 mm                 |
| Overall Thickness    | 0.098 in   | 2.5 mm                  |
| Edge Profile         | Squared Edge   |                         |
| Installation Type    | Dry Back   |                         |
| Installation         | Direct Glue  |                         |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon |                         |

Packaging

|                   |           |           |
|-------------------|-----------|-----------|
| Pieces per Carton | 10 pcs    |           |
| Area per Carton   | 45 sq ft  | 4.18 sq m |
| Weight per Carton | 37.65 lbs | 17.08 kg  |



Recommended Installation Method

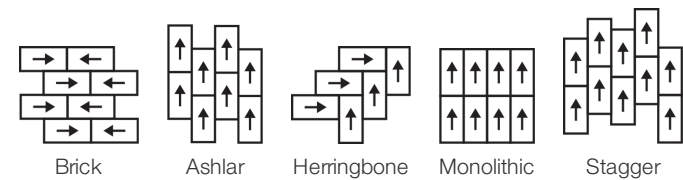

Coordinating Products

LVT: Surface

Performance + Testing

|   |   |  |
|---|---|--|
| Static Load (ASTM F970)                               | Passes (Modified), *1500 lbs  | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914)                     | Passes  |  |
| Resistance to Heat (ASTM F1514)                       | Passes  |  |
| Resistance to Light (ASTM F1515)                      | Passes  |  |
| Resistance to Chemicals (ASTM F925)                   | Passes  |  |
| Radiant Panel (ASTM E648)                             | Passes, Class I   |  |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |  |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

|   |  |
|---|--|
| Health & Wellbeing                      |  |
| Material Ingredient Transparency        | Health Product Declaration (HPD)   1000 ppm Disclosure                       |
| Indoor Air Quality                      | FloorScore®   Certified  |
| Climate Impact                          |  |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate)        | 7.31 Kg CO <sub>2</sub> /M <sup>2</sup>                                      |
| Life-Cycle Carbon Emissions             | Low Embodied Carbon  |
| Total Recycled Content                  | 0% (Pre-Consumer 0%   Post-Consumer 0%)                                      |
| Global Product Assessment               | GSA   Approved   |
|   | CE Marking (EN 14041)   3rd Party Certified                                  |
|   | Country of Origin   Imported   |

WELL V2 Contribution Credit

|  |  |
|--|--|
| X01 Fundamental Material Precautions<br>Part 1: (C): Restrict Asbestos Precondition                    | <b>Absence of Asbestos</b>                     |
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                     | <b>Absence of Heavy Metals</b>                 |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization   | <b>Absence of Halogenated Flame Retardants</b> |
| X10 Volatile Compound Reduction<br>Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | <b>Ortho-Phthalates</b>                        |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                       | <b>FloorScore Certificate</b>                  |




Leed v4 Contribution Credits

|   |   |
|---|---|
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 1: Material Ingredient Reporting                         | <b>Health Product Declaration (HPD)   100 Ppm Disclosure</b>                            |
| MR Credit: Building Product Disclosure and Optimization<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b> |
| EQ Credit: Low Emitting Materials<br>Option 1: Product Category Calculations  | <b>FloorScore Certified</b>   |

[Installation Guidelines](#)  
[Maintenance Guidelines](#)





Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Wool 16115<br>LRV 38   L* 68.01<br>V2 - Slight Variation                         | Chalk 16515<br>LRV 58.4   L* 80.95<br>V2 - Slight Variation                       | Dune 16516<br>LRV 36.9   L* 67.19<br>V2 - Slight Variation                        | Pebble 16530<br>LRV 16.7   L* 47.87<br>V2 - Slight Variation                       | Silt 16595<br>LRV 9.8   L* 37.42<br>V2 - Slight Variation                           | Clay 16761<br>LRV 22.8   L* 54.91<br>V2 - Slight Variation                          |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

|    |   |    |  |    |   |    |   |
|----|---|----|--|----|---|----|---|
| V1 |  | V2 |  | V3 |  | V4 |  |
|    | Uniform Appearance  |    | Slight Variation   |    | Moderate Variation  |    | Substantial Variation   |

