


## Strand


コレクション	<b>Surface + Strand</b>	
スタイルナンバー	<b>0516V</b>	
建設	<b>Heavy Commercial Luxury Vinyl Tile</b>	
クラス	<b>Class III, Type B</b>	
仕上げ	<b>ExoGuard®</b>	
	米国	メートル法
公称寸法	<b>18 in w x 36 in l</b>	<b>46 cm w x 91 cm l</b>
実際の寸法	<b>18.00 in w x 36.00 in l</b>	<b>45.72 cm w x 91.44 cm l</b>
摩耗層の厚さ	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
製品全体の厚さ	<b>0.098 in</b>	<b>2.5 mm</b>
エッジプロファイル	スクエア エッジ	
Installation Type	<b>Dry Back</b>	
インストール	<b>Direct Glue</b>	
推奨接着剤	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

## 包装

ボックスあたりの個数	<b>10 pcs</b>	
ボックスあたりの面積	<b>45 sq ft</b>	<b>4.18 sq m</b>
ボックスあたりの重量	<b>37.65 lbs</b>	<b>17.08 kg</b>

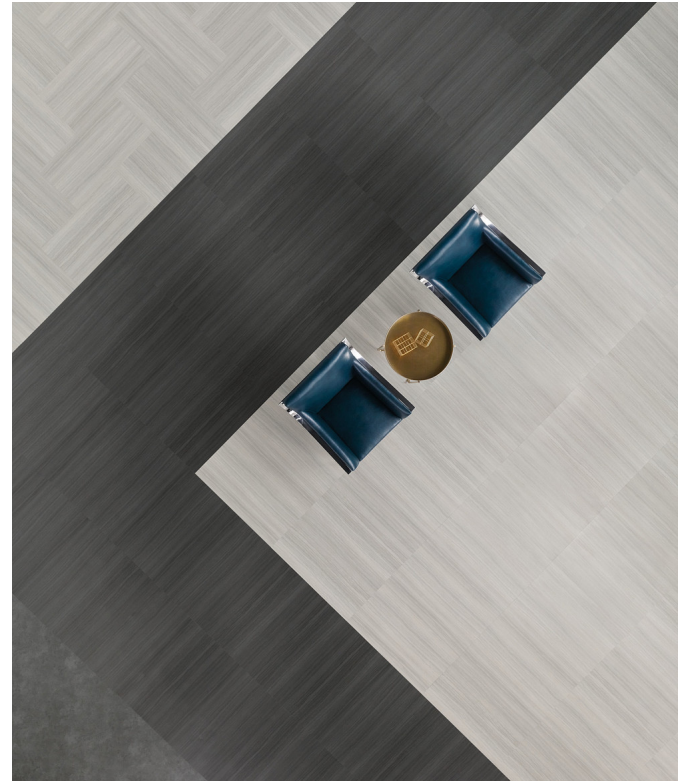

## 推奨インストール方法

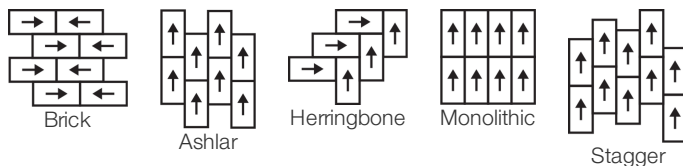

## コーディネート商品

LVT: Surface

## パフォーマンス + テスト

静荷重 (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>
残留圧痕 (ASTM F1914)	<b>Passes</b>
耐熱性 (ASTM F1514)	<b>Passes</b>
耐光性 (ASTM F1515)	<b>Passes</b>
耐薬品性 (ASTM F925)	<b>Passes</b>
放射パネル (ASTM E648)	<b>Passes, Class I</b>
摩擦係数(ASTM D2407、滑り抵抗)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

\*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 保証

[Commercial 15 Year Underbed Bond Warranty](#)[15年の商用限定保証](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 属性+認定

## Health &amp; Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)[FloorScore® | 認証取得](#)

## Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

[ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得](#)7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Low Embodied Carbon

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 第三者認証取得

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos****Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore Certificate**

## グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築

材料成分-オプション1：材料成分レポート

MRクレジット：製品の開示と最適化の構築

環境製品宣言-オプション1：環境製品宣言 (EPD)

EQクレジット：低排出材料

オプション1：製品カテゴリの計算


**Health Product Declaration (HPD) | 100 Ppm Disclosure****3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore® Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Wool 16115 LRV 38   L* 68.01 V2 - Slight Variation	Chalk 16515 LRV 58.4   L* 80.95 V2 - Slight Variation	Dune 16516 LRV 36.9   L* 67.19 V2 - Slight Variation	Pebble 16530 LRV 16.7   L* 47.87 V2 - Slight Variation	Silt 16595 LRV 9.8   L* 37.42 V2 - Slight Variation	Clay 16761 LRV 22.8   L* 54.91 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation

