


Strand


Collection	Surface + Strand	
Style Number	0516V	
Aspect class	Heavy Commercial Luxury Vinyl Tile	
Finish	Class III, Type B	
	ExoGuard®	
	Metric	U.s.
Nominal Dimensions	46 cm w x 91 cm l	18 in w x 36 in l
Actual Dimensions	45.72 cm w x 91.44 cm l	18.00 in w x 36.00 in l
Wear Layer Thickness	0.51 mm	20 mil (0.02 in)
Overall Product Thickness	2.5 mm	0.098 in
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

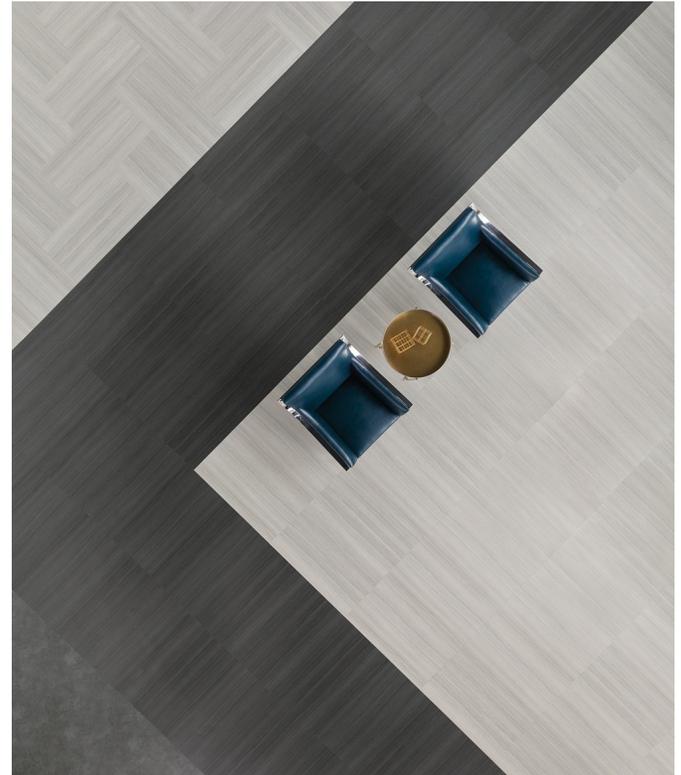

Packaging

Pieces Per Box	10 pcs	
Area Per Box	4.18 sq m	45 sq ft
Weight Per Box	17.08 kg	37.65 lbs

Recommended Installation Method

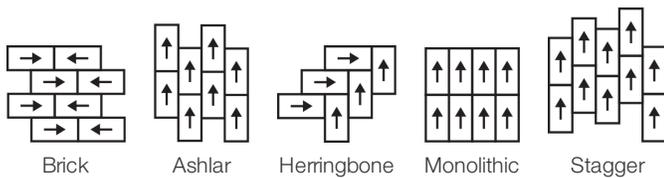

Coordinating Products

LVT: Surface

Performance + Testing

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited

[Commercial 15 Year Underbed Bond Warranty](#)

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

FloorScore®

CE Marking (EN 14041)

Total Recycled Content

Country of Origin

[1000 ppm Disclosure](#)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

7.31 Kg Co₂/M²

[Certified](#)

3rd Party Certified

0% (Pre-Consumer 0% | Post-Consumer 0%)

South Korea

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

Absence of Heavy Metals

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

Absence of Halogenated Flame Retardants

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

Ortho-Phthalates

X11 Long Term Emissions Control
Part 2: Flooring Optimization

FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 100 Ppm Disclosure

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

FloorScore Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Light Reflectance Value

					
Wool 16115 LRV 38 V2 - Slight Variation	Chalk 16515 LRV 58.4 V2 - Slight Variation	Dune 16516 LRV 36.9 V2 - Slight Variation	Pebble 16530 LRV 16.7 V2 - Slight Variation	Silt 16595 LRV 9.8 V2 - Slight Variation	Clay 16761 LRV 22.8 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--

