

Surface


コレクション	Surface + Strand	
スタイルナンバー	0515V	
建設	Heavy Commercial Luxury Vinyl Tile	
クラス	Class III, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	18 in w x 36 in l	46 cm w x 91 cm l
実際の寸法	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
摩耗層の厚さ	20 mil (0.02 in)	0.51 mm
製品全体の厚さ	0.098 in	2.5 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Dry Back	
インストール	Direct Glue	
推奨接着剤	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	10 pcs	
ボックスあたりの面積	45 sq ft	4.18 sq m
ボックスあたりの重量	37.65 lbs	17.08 kg



推奨インストール方法

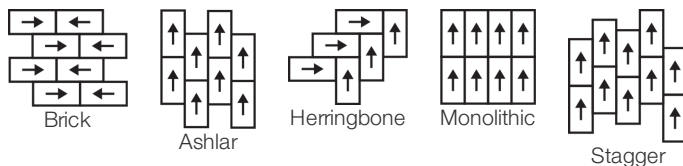

コーディネート商品

LVT: Strand

パフォーマンス + テスト

静荷重 (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
残留圧痕 (ASTM F1914)	Passes	
耐熱性 (ASTM F1514)	Passes	
耐光性 (ASTM F1515)	Passes	
耐薬品性 (ASTM F925)	Passes	
放射パネル (ASTM E648)	Passes, Class I	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
摩擦係数(ASTM D2407、滑り抵抗)		

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[Commercial 15 Year Underbed Bond Warranty](#)[15年の商用限定保証](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+認定

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)[FloorScore® | 認証取得](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

[ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得](#)7.31 Kg CO₂/M²

Low Embodied Carbon

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 第三者認証取得

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore Certificate**

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築

材料成分-オプション1：材料成分レポート

MRクレジット：製品の開示と最適化の構築

環境製品宣言-オプション1：環境製品宣言 (EPD)

EQクレジット：低排出材料

オプション1：製品カテゴリの計算

Health Product Declaration (HPD) | 100 Ppm Disclosure**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore® Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Granite 15111
V2 - Slight Variation



Cashmere 15114
V2 - Slight Variation



Natural 15155
V2 - Slight Variation



Pitch 15500
LRV 8 | L* 34.07
V2 - Slight Variation




Boulder 15506
V2 - Slight Variation




Quartz 15515
V2 - Slight Variation




Cement 15518
V2 - Slight Variation



Gravel 15530
V2 - Slight Variation



Sediment 15595
V2 - Slight Variation



Soil 15740
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

