

Surface


수집	Surface + Strand	
스타일 번호	0515V	
구성	Heavy Commercial Luxury Vinyl Tile	
수업	Class III, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	18 in w x 36 in l	46 cm w x 91 cm l
실제 치수	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
마모 층 두께	20 mil (0.02 in)	0.51 mm
전체 제품 두께	0.098 in	2.5 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

포장

상자 당 조각	10 pcs	
상자 당 면적	45 sq ft	4.18 sq m
상자 당 무게	37.65 lbs	17.08 kg



권장 설치 방법

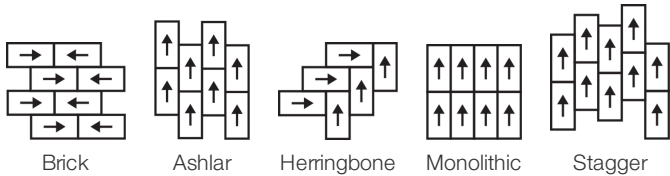

코디네이팅 제품

LVT: Strand

공연 + 테스트

정적 하중 (Astm F970)  
잔차 들어 쓰기 (Astm F1914)  
내열성 (Astm F1514)  
내광성 (Astm F1515)  
화학 물질에 대한 내성 (Astm F925)  
복사 패널 (Astm E648)  
마찰 계수(astm D2407, 미끄러짐 저항)

**Passes (Modified), \*1500 lbs**  
**Passes**  
**Passes**  
**Passes**  
**Passes**  
**Passes, Class I**  
**≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces**

이 테스트는 다양한 스타일과 구성의 상대적인 속성을 비교하기위한 것입니다. 결과는 실험실 테스트를 기반으로하며 비교 목적으로 사용됩니다. 실제 하중 한계는 다를 수 있습니다.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

[15년 상용 제한](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

속성 + 인증

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | 인증](#)

Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

[ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득](#)  
7.31 Kg Co<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[CE Marking \(EN 14041\) | 타사 인증 획득](#)  
[Country of Origin | Imported](#)

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
재료 성분-옵션 1 : 재료 성분보고  
MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](#) for more information.

Available Colorways



Granite 15111  
V2 - Slight Variation



Cashmere 15114  
V2 - Slight Variation



Natural 15155  
V2 - Slight Variation



Pitch 15500  
LRV 8 | L\* 34.07  
V2 - Slight Variation




Boulder 15506  
V2 - Slight Variation



Quartz 15515  
V2 - Slight Variation



Cement 15518  
V2 - Slight Variation



Gravel 15530  
V2 - Slight Variation



Sediment 15595  
V2 - Slight Variation




Soil 15740  
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation