

## Surface


수집	<b>Surface + Strand</b>	
스타일 번호	<b>0515V</b>	
구성	<b>Heavy Commercial Luxury Vinyl Tile</b>	
수업	<b>Class III, Type B</b>	
끝	<b>ExoGuard®</b>	
	미국	미터법
공칭 치수	<b>18 in w x 36 in l</b>	<b>46 cm w x 91 cm l</b>
실제 치수	<b>18.00 in w x 36.00 in l</b>	<b>45.72 cm w x 91.44 cm l</b>
마모 층 두께	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
전체 제품 두께	<b>0.098 in</b>	<b>2.5 mm</b>
가장자리 프로파일	<b>사각형 모서리</b>	
Installation Type	<b>Dry Back</b>	
설치	<b>Direct Glue</b>	
권장 접착제	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

## 포장

상자 당 조각	<b>10 pcs</b>	
상자 당 면적	<b>45 sq ft</b>	<b>4.18 sq m</b>
상자 당 무게	<b>37.65 lbs</b>	<b>17.08 kg</b>



## 권장 설치 방법

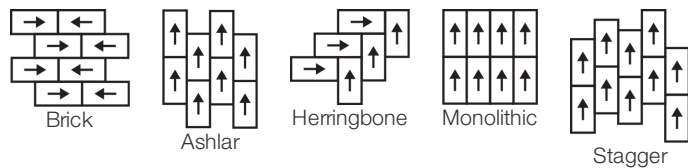

## 코디네이팅 제품

LVT: Strand

## 공연 + 테스트

정적 하중 (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>
잔차 들어 쓰기 (ASTM F1914)	<b>Passes</b>
내열성 (ASTM F1514)	<b>Passes</b>
내광성 (ASTM F1515)	<b>Passes</b>
화학 물질에 대한 내성 (ASTM F925)	<b>Passes</b>
복사 패널 (ASTM E648)	<b>Passes, Class I</b>
마찰 계수 (ASTM D2407, 미끄러짐 저항)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

\*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 보증

[Commercial 15 Year Underbed Bond Warranty](#)[15년 상용 제한](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 속성 + 인증

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | 인증

## Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득  
7.31 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 타사 인증 획득  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

## 녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
재료 성분-옵션 1 : 재료 성분보고  
MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**


[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Granite 15111  
V2 - Slight Variation



Cashmere 15114  
V2 - Slight Variation



Natural 15155  
V2 - Slight Variation



Pitch 15500  
LRV 8 | L\* 34.07  
V2 - Slight Variation




Boulder 15506  
V2 - Slight Variation



Quartz 15515  
V2 - Slight Variation



Cement 15518  
V2 - Slight Variation



Gravel 15530  
V2 - Slight Variation



Sediment 15595  
V2 - Slight Variation



Soil 15740  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

