

Surface


コレクション	Surface + Strand	
スタイルナンバー	0515V	
建設	Heavy Commercial Luxury Vinyl Tile	
クラス	Class III, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	18 in w x 36 in l	46 cm w x 91 cm l
実際の寸法	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
摩耗層の厚さ	20 mil (0.02 in)	0.51 mm
製品全体の厚さ	0.098 in	2.5 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Dry Back	
インストール	Direct Glue	
推奨接着剤	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	10 pcs	
ボックスあたりの面積	45 sq ft	4.18 sq m
ボックスあたりの重量	37.65 lbs	17.08 kg



推奨インストール方法

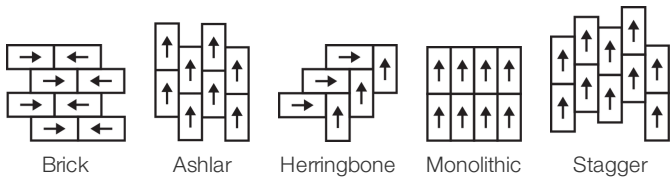

コーディネート商品

LVT: Strand

パフォーマンス + テスト

残留圧痕 (astm F1914)	Passes
耐熱性 (astm F1514)	Passes
耐光性 (astm F1515)	Passes
耐薬品性 (astm F925)	Passes
摩擦係数(astm D2407、滑り抵抗)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[15年の商用限定保証](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

属性+認定

Health & Wellbeing

Material Ingredient Transparency

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

Climate Impact

Environmental Product Declaration (EPD)

[ISO 14025、EN 15804 および ISO 21930:2017 に基づく 第三者認証取得](#)

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[FloorScore® | 認証取得](#)

CE Marking (EN 14041) | 第三者認証取得

Country of Origin | Imported

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築

材料成分-オプション1：材料成分レポート

MRクレジット：製品の開示と最適化の構築

環境製品宣言-オプション1：環境製品宣言 (EPD)

EQクレジット：低排出材料

オプション1：製品カテゴリの計算

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways




Granite 15111  
V2 - Slight Variation



Cashmere 15114  
V2 - Slight Variation



Natural 15155  
V2 - Slight Variation



Pitch 15500  
LRV 8  
V2 - Slight Variation



Boulder 15506  
V2 - Slight Variation



Quartz 15515  
V2 - Slight Variation



Cement 15518  
V2 - Slight Variation



Gravel 15530  
V2 - Slight Variation



Sediment 15595  
V2 - Slight Variation



Soil 15740  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

