

Surface


수집	Surface + Strand	
스타일 번호	0515V	
구성	Heavy Commercial Luxury Vinyl Tile	
수업	Class III, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	18 in w x 36 in l	46 cm w x 91 cm l
실제 치수	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
마모 층 두께	20 mil (0.02 in)	0.51 mm
전체 제품 두께	0.098 in	2.5 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

포장

상자 당 조각	10 pcs	
상자 당 면적	45 sq ft	4.18 sq m
상자 당 무게	37.65 lbs	17.08 kg



권장 설치 방법

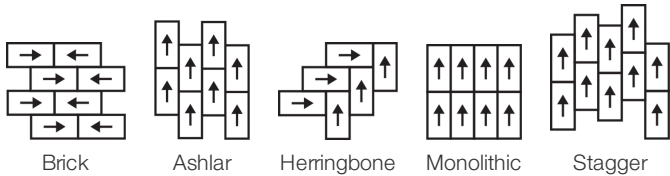

코디네이팅 제품

LVT: Strand

공연 + 테스트

잔차 들어 쓰기 (Astm F1914)
내열성 (Astm F1514)
내광성 (Astm F1515)
화학 물질에 대한 내성 (Astm F925)
마찰 계수(astm D2407, 미끄러짐 저항)

Passes
Passes
Passes
Passes
≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

[15년 상용 제한](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

속성 + 인증

Health & Wellbeing

Material Ingredient Transparency

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Total Recycled Content

[ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득](#)

7.31 Kg Co₂/M²

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[FloorScore® | 인증](#)

CE Marking (EN 14041) | 타사 인증 획득

Country of Origin | Imported

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축
재료 성분-옵션 1 : 재료 성분보고

MR 크레딧 : 제품 공개 및 최적화 구축
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)

EQ 크레딧 : 저 발광 재료
옵션 1 : 제품 범주 계산

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways



Granite 15111
V2 - Slight Variation



Cashmere 15114
V2 - Slight Variation



Natural 15155
V2 - Slight Variation



Pitch 15500
LRV 8
V2 - Slight Variation



Boulder 15506
V2 - Slight Variation



Quartz 15515
V2 - Slight Variation



Cement 15518
V2 - Slight Variation



Gravel 15530
V2 - Slight Variation



Sediment 15595
V2 - Slight Variation



Soil 15740
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

