

Surface


Collectie	Surface + Strand	
Stijlnummer	0515V	
Uitzicht	Hoog Commercieel Gebruik Luxe Vinyl Tegel	
klasse	Class III, Type B	
Afwerking	ExoGuard®	
	U.s.	Metric
Nominale Afmetingen	18 in w x 36 in l	46 cm w x 91 cm l
Werkelijke Afmetingen	18.00 in w x 36.00 in l	45.72 cm w x 91.44 cm l
Dikte Slijtlaag	20 mil (0.02 in)	0.51 mm
Totale Dikte Van Het Product	0.098 in	2.5 mm
Randprofiel	Vierkante Rand	
Installation Type	Dry Back	
Installatie	Direct Glue	
Aanbevolen Kleefstof	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Verpakking

Stuks Per Doos	10 pcs	
Oppervlakte Per Doos	45 sq ft	4.18 sq m
Gewicht Per Doos	37.65 lbs	17.08 kg



Aanbevolen Installatiemethode

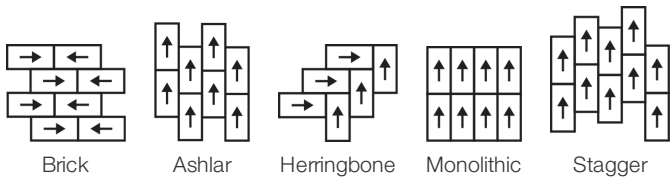

Coördinerende Producten

LVT: Strand

Prestatie + Testen

Resterende Indeuking (Astm F1914)	Passes
Hittebestendigheid (Astm F1514)	Passes
Weerstand Tegen Licht (Astm F1515)	Passes
Weerstand Tegen Chemicaliën (Astm F925)	Passes
Wrijvingscoëfficiënt (Astm D2407, Slipweerstand)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[15 Jaar Commercieel Beperkt](#)[Commercial 15 Year Underbed Bond Warranty](#)

producttransparantie

Shaw Contract streeft ernaar klanten een bouwchemie bieden die veilig en betrouwbaar is. Samen zullen wij u helpen om uw doelstellingen op het gebied van materiaalgezondheid te bereiken. Luxe Vinyl

Kenmerken + Certificeringen

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

FloorScore®

CE-markering (EN 14041)

Total Recycled Content

land van herkomst

[1000 ppm Disclosure](#)[3de Partij Gecertificeerd in Overeenstemming Met ISO 14025, EN 15804, & ISO 21930:2017](#)**7.31 Kg Co₂/M²**[Gecertificeerd](#)**3de Partij Gecertificeerd****0% (Pre-Consumer 0% | Post-Consumer 0%)****South Korea**

WELL V2 Contribution Credit

X01 Fundamental Material Precautions

Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction

Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction

Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control

Part 2: Flooring Optimization

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore Certificate**

Groen Leed Bijdragekrediet

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten
Materiaalingrediënten - Optie 1: Rapportage materiaalingrediënten"

"MR-krediet: openbaarmaking en optimalisering van bouwproducten
Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

"EQ-krediet: materialen met lage emissie Optie 1: Berekeningen per productcategorie"

Health Product Declaration (HPD) | 100 Ppm Disclosure**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Lichtreflectiewaarde



Granite 15111
V2 - Slight Variation



Cashmere 15114
V2 - Slight Variation



Natural 15155
V2 - Slight Variation



Pitch 15500
LRV 8
V2 - Slight Variation



Boulder 15506
V2 - Slight Variation



Quartz 15515
V2 - Slight Variation



Cement 15518
V2 - Slight Variation



Gravel 15530
V2 - Slight Variation



Sediment 15595
V2 - Slight Variation




Soil 15740
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation

