

## Grain Direct Glue


Collection	<b>Grain + Pigment</b>	
Numéro De Style	<b>0502V</b>	
Construction	<b>Carreau De Vinyle De Luxe Commercial Lourd</b>	
classe	<b>Class III, Type B</b>	
Finition	<b>ExoGuard®</b>	
	Impérial	Métrique
Dimensions Nominales	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Dimensions Réelles	<b>7.00 in w x 48.00 in l</b>	<b>17.78 cm w x 121.92 cm l</b>
Épaisseur De La Couche d'Usure	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Épaisseur Générale Du Produit	<b>0.098 in</b>	<b>2.5 mm</b>
Profil Du Bord	<b>Bord Carré</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Adhésif Recommandé	<b>S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon</b>	



## Emballage

Pièces Par Carton	<b>15 pcs</b>	
Surface Par Carton	<b>34.98 sq ft</b>	<b>3.25 sq m</b>
Poids Par Carton	<b>29.32 lbs</b>	<b>13.3 kg</b>

## Méthodes d'Installation Conseillées

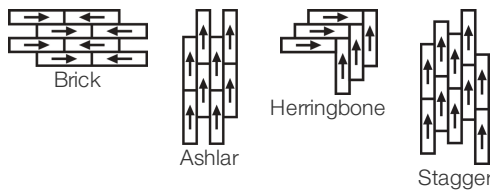

## Coordination Des Produits

LVT: Grain Floating, Pigment Floating, Pigment Direct Glue

## performance + Tests et essai

poinçonnement rémanent (ASTM F1914)  
 résistance à la chaleur (ASTM F1514)  
 résistance à la lumière (ASTM F1515)  
 résistance chimique (ASTM F925)  
 Essai au panneau radiant (Astm E648)  
 coefficient de frottement (ASTM D2407,  
 résistance au glissement)

**Passes**

**Passes**

**Passes**

**Passes**

**Passes, Class I**

**>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes**

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garanties

[Commercial 15 Year Underbed Bond Warranty](#)

[Limitée Commerciale De 15 Ans](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

### Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

[FloorScore® | Agréé](#)

### Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Low Embodied Carbon

0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

**Absence of Heavy Metals**

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

**Absence of Halogenated Flame Retardants**

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

**Ortho-Phthalates**

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

**FloorScore Certificate**

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulgence et optimisation des produits de construction

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

« Crédit MR : Divulgence et optimisation des produits de construction

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

Crédit EQ : matériaux faibles émissions

**FloorScore Certified**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways



Cocoa 64103  
LRV 20.3  
V2 - Slight Variation



Glow 64105  
LRV 36.8




Parchment 64111  
LRV 43.4  
V2 - Slight Variation



Alabaster 64114  
LRV 47.9  
V3 - Moderate Variation



Buff 64140  
LRV 30.3  
V2 - Slight Variation



Nutshell 64150  
LRV 14.4  
V2 - Slight Variation



Ashen 64155  
LRV 27.7  
V2 - Slight Variation



Bare 64200  
LRV 43  
V2 - Slight Variation



Honey 64240  
LRV 25.6  
V2 - Slight Variation



Fog 64327  
LRV 22  
V3 - Moderate Variation



Alloy 64515  
LRV 33.2



Weathered 64518  
LRV 31.8  
V2 - Slight Variation



Mercury 64530  
LRV 26.9



Char 64549  
LRV 7.4  
V2 - Slight Variation



Cinder 64557  
LRV 18



Earthen 64710  
LRV 10.4  
V3 - Moderate Variation



Bark 64720  
LRV 14.1  
V2 - Slight Variation



Clove 64740  
LRV 8  
V2 - Slight Variation



Chickory 64752  
LRV 7.3  
V2 - Slight Variation



Russet 64760  
LRV 7.9  
V2 - Slight Variation



Antler 64761  
LRV 18.5  
V2 - Slight Variation



Ginger 64820  
LRV 16.7  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

