

## Grain Direct Glue


Coleção	<b>Grain + Pigment</b>	
Número Do Produto	<b>0502V</b>	
Construção	<b>Heavy Commercial Luxury Vinyl Tile</b>	
classe	<b>Class III, Type B</b>	
Acabamento	<b>ExoGuard®</b>	
	U.s.	Metric
Dimensões Nominais	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Dimensões Reais	<b>7.00 in w x 48.00 in l</b>	<b>17.78 cm w x 121.92 cm l</b>
Espessura Da Camada De Uso	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Espessura Total Do Produto	<b>0.098 in</b>	<b>2.5 mm</b>
Perfil De Borda	<b>Borda Quadrada</b>	
Installation Type	<b>Dry Back</b>	
Instalação	<b>Direct Glue</b>	
Adesivo Recomendado	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	



## Empacotamento

Peças Por Caixa	<b>15 pcs</b>	
Área Por Caixa	<b>34.98 sq ft</b>	<b>3.25 sq m</b>
Peso Por Caixa	<b>29.32 lbs</b>	<b>13.3 kg</b>

## Método De Instalação Recomendado

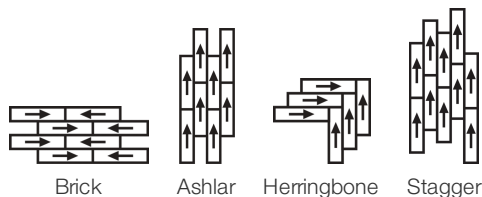

## Produtos Coordenados

LVT: Grain Floating, Pigment Floating, Pigment Direct Glue

## desempenho + teste

recuo residual (ASTM F1914)	<b>Passes</b>
resistência ao calor (ASTM F1514)	<b>Passes</b>
resistência à luz (ASTM F1515)	<b>Passes</b>
resistência a produtos químicos (ASTM F925)	<b>Passes</b>
painel radiante (ASTM E648)	<b>Passes, Class I</b>
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garantias

[15 Anos Comercial Limitada](#)
[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Atributos + Certificações

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certificado

## Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Life-Cycle Carbon Emissions

Low Embodied Carbon

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | Certificado 3rd Party  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

**Absence of Heavy Metals**

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

**Absence of Halogenated Flame Retardants**

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

**Ortho-Phthalates**

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**FloorScore Certificate**

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

**FloorScore® Certified**

[Installation Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways



Cocoa 64103  
LRV 20.3  
V2 - Slight Variation



Glow 64105  
LRV 36.8




Parchment 64111  
LRV 43.4  
V2 - Slight Variation



Alabaster 64114  
LRV 47.9  
V3 - Moderate Variation



Buff 64140  
LRV 30.3  
V2 - Slight Variation



Nutshell 64150  
LRV 14.4  
V2 - Slight Variation



Ashen 64155  
LRV 27.7  
V2 - Slight Variation



Bare 64200  
LRV 43  
V2 - Slight Variation



Honey 64240  
LRV 25.6  
V2 - Slight Variation



Fog 64327  
LRV 22  
V3 - Moderate Variation



Alloy 64515  
LRV 33.2



Weathered 64518  
LRV 31.8  
V2 - Slight Variation



Mercury 64530  
LRV 26.9



Char 64549  
LRV 7.4  
V2 - Slight Variation



Cinder 64557  
LRV 18



Earthen 64710  
LRV 10.4  
V3 - Moderate Variation



Bark 64720  
LRV 14.1  
V2 - Slight Variation



Clove 64740  
LRV 8  
V2 - Slight Variation



Chickory 64752  
LRV 7.3  
V2 - Slight Variation



Russet 64760  
LRV 7.9  
V2 - Slight Variation



Antler 64761  
LRV 18.5  
V2 - Slight Variation



Ginger 64820  
LRV 16.7  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

