

## Pigment Direct Glue


Collection	<b>Grain + Pigment</b>	
Style Number	<b>0503V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard®</b>	
	U.s.	Metric
Nominal Dimensions	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Actual Dimensions	<b>7.00 in w x 48.00 in l</b>	<b>17.78 cm w x 121.92 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

### Packaging

Pieces Per Carton	<b>15 pcs</b>	
Area Per Carton	<b>34.98 sq ft</b>	<b>3.25 sq m</b>
Weight Per Carton	<b>29.32 lbs</b>	<b>13.3 kg</b>



### Recommended Installation Method

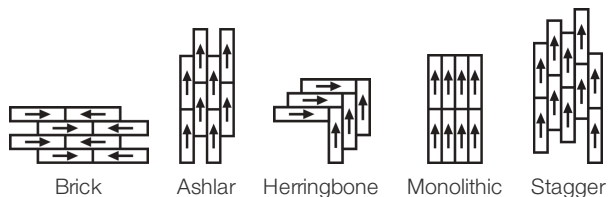

### Coordinating Products

LVT: Grain Floating, Pigment Floating, Grain Direct Glue

### Performance + Testing

Residual Indentation (ASTM F1914)	<b>Passes</b>
Resistance to Heat (ASTM F1514)	<b>Passes</b>
Resistance to Light (ASTM F1515)	<b>Passes</b>
Resistance to Chemicals (ASTM F925)	<b>Passes</b>
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[15 Year Commercial Limited](#)[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health &amp; Environmental Certifications

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

## Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
7.31 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

## Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**













[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.





Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways

					
Beige 65114 LRV 51.2 V1 - Uniform Appearance	Stone 65115 LRV 27.4 V1 - Uniform Appearance	Yellow 65201 LRV 46.5 V1 - Uniform Appearance	Green 65326 LRV 23.1 V1 - Uniform Appearance	Blue 65429 LRV 9.3 V1 - Uniform Appearance	Cyan 65436 LRV 19.2 V1 - Uniform Appearance
					
Bone 65515 LRV 54.1 V1 - Uniform Appearance	Grey 65530 LRV 27.5 V1 - Uniform Appearance	Charcoal 65595 LRV 11.5 V1 - Uniform Appearance	Orange 65675 LRV 21 V1 - Uniform Appearance	Taupe 65761 LRV 12.9 V1 - Uniform Appearance	Red 65855 LRV 11.6 V1 - Uniform Appearance

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1 	V2 	V3 	V4 
Uniform Appearance	Slight Variation	Moderate Variation	Substantial Variation

