

## Defined


Coleção	<b>Stratum</b>	
Número Do Produto	<b>058UV</b>	
Construção	<b>WPC Multicamada Com Camada De Cortiça Anexada</b>	
classe	<b>Class III, Type B</b>	
Manta Inferior Adicional	<b>Cortiça</b>	
Acabamento	<b>ExoGuard®</b>	
	U.s.	Metric
Dimensões Nominais	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Dimensões Reais	<b>7.09 in w x 48.03 in l</b>	<b>18.01 cm w x 122.00 cm l</b>
Espessura Da Camada De Uso	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Espessura Total Do Produto	<b>0.315 in</b>	<b>8 mm</b>
Installation Type	<b>Click</b>	
Instalação	<b>Floating Or Direct Glue</b>	
Adesivo Recomendado	<b>, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL</b>	



## Empacotamento

Peças Por Caixa	<b>10 pcs</b>	
Área Por Caixa	<b>23.64 sq ft</b>	<b>2.2 sq m</b>
Peso Por Caixa	<b>39.68 lbs</b>	<b>18 kg</b>

## Método De Instalação Recomendado



## Produtos Coordenados

COREtec: Stratum 500, Stratum 700, Stratum XI, Stratum Eiris, Stratum Linear

## desempenho + teste

resistência ao calor (ASTM F1514)	<b>Passes</b>
resistência à luz (ASTM F1515)	<b>Passes</b>
resistência a produtos químicos (ASTM F925)	<b>Passes</b>
painel radiante (ASTM E648)	<b>Passes, Class I</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.5 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	41% (Pre-Consumer 41%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>Greenguard Gold Certificate</b>






Crédito De Contribuição


MR Credit: Divulgação e otimização de produtos de construção Ingredientes materiais - Opção 1: Relatório de ingredientes materiais	<b>Health Product Declaration (HPD)   100 Ppm Disclosure</b>
MR Credit: Divulgação e otimização de produtos de construção Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
Crédito de EQ: Materiais de baixa emissão Opção 1: cálculos de categoria de produto	<b>FloorScore® Certified</b>
Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Specify 03001 V4 - Substantial Variation	Express 03002 V3 - Moderate Variation	Exemplify 03004 V3 - Moderate Variation	Detail 03005 V3 - Moderate Variation	Elucidate 03006 V4 - Substantial Variation	Represent 03007 V4 - Substantial Variation

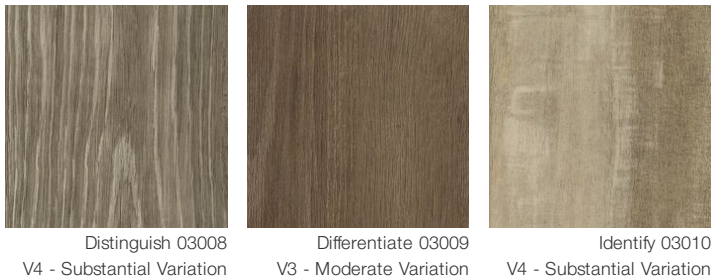

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

