

Defined

Coleção	Stratum	
Número Do Produto	058UV	
Construção	WPC Multicamada Com Camada De Cortiça Anexada	
classe	Class III, Type B	
Manta Inferior Adicional	Cortiça	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	7 in w x 48 in l	18 cm w x 122 cm l
Dimensões Reais	7.09 in w x 48.03 in l	18.01 cm w x 122.00 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.315 in	8 mm
Installation Type	Click	
Instalação	Floating Or Direct Glue	
Adesivo Recomendado	4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon, 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	



Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	23.64 sq ft	2.2 sq m
Peso Por Caixa	39.68 lbs	18 kg

Método De Instalação Recomendado



Produtos Coordenados

None: Stratum 1200
COREtec: Stratum 500, Stratum 700, Stratum XI, Stratum Eiris, Stratum Linear

Desempenho + Teste

Resistência Ao Calor (Astm F1514)	Passes
Resistência À Luz (Astm F1515)	Passes
Resistência A Produtos Químicos (Astm F925)	Passes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

15 Anos Comercial Limitada

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017

Total Recycled Content

41% (Pre-Consumer 41% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | Certificado
Greenguard (Certification, Gold, Private Label) | Certificado
Country of Origin | China

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

Health Product Declaration (HPD) | 100 Ppm Disclosure

MR Credit: Divulgação e otimização de produtos de construção
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Crédito de EQ: Materiais de baixa emissão
Opção 1: cálculos de categoria de produto

FloorScore & Greenguard Gold Certified

Installation Guidelines


Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


Maintenance Guidelines

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Specify 03001	Express 03002	Exemplify 03004	Detail 03005	Elucidate 03006	Represent 03007
V4 - Substantial Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V4 - Substantial Variation	V4 - Substantial Variation

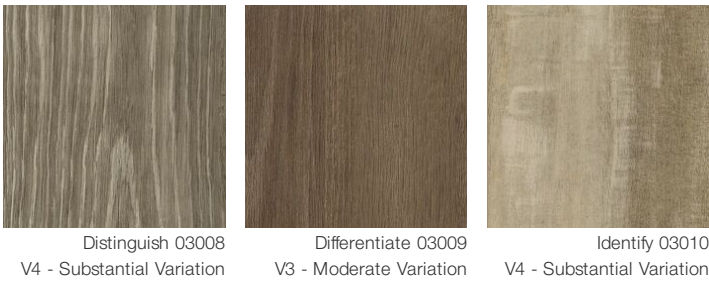

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

