

Terrain II 12 Mil


Colección	Terrain II	
Número De Estilo	0453V	
Construcción	Luxury Vinyl Tile De Uso Comercial Ligero	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensiones Reales	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Desgaste De La Capa De Uso	12 mil (0.012 in)	0.3 mm
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	21 pcs	
Área Por Caja	41.72 sq ft	3.88 sq m
Peso Por Caja	36 lbs	16.33 kg



Método De Instalación Recomendado

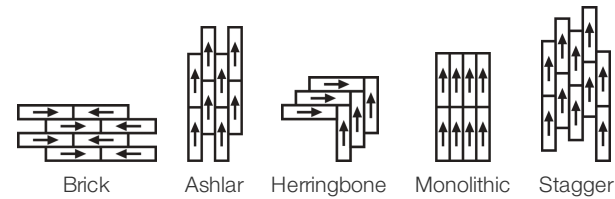

Productos Que Combinan

LVT: Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm

Rigid Core: Terrain II Rigid Core

Desempeño + Pruebas

Carga Estática (Astm F970)	Passes (Modified), *1500 lbs	Esta Prueba Tiene La Función De Comparar Propiedades Relativas De Diferentes Estilos Y Construcciones. Los Resultados Se Basan En Una Prueba De Laboratorio Y Se Utilizan Con Fines Comparativos: El Límite De Carga En La Vida Real Puede Variar.
Margen Adicional Residual (Astm F1914)	Passes	
Resistencia Al Calor (Astm F1514)	Passes	
Resistencia A La Luz (Astm F1515)	Passes	
Resistencia A Productos Químicos (Astm F925)	Passes	
Panel Radiante (Astm E648)	Passes, Class I	
Coefficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

7 Años Limitado A Uso Comercial

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	30% (Pre-Consumer 30% Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
	CE Marking (EN 14041) Certificado Tercerizado
	Country of Origin United States

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Información Adicional

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)

[Maintenance Guidelines](#)


Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.


Available Colorways


					
Satinwood 00140 V3 - Moderate Variation	Willow 00170 V4 - Substantial Variation	Thatch 00173 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210 V3 - Moderate Variation	Prime 00240 V3 - Moderate Variation
					
Trail 00256 V2 - Slight Variation	Poplar 00515 V3 - Moderate Variation	Shade 00564 V2 - Slight Variation	Root 00568 V4 - Substantial Variation	Timber 00572 V2 - Slight Variation	Taun 00660 V3 - Moderate Variation
					
Pirch 00684 V2 - Slight Variation	Lodge 00740 V2 - Slight Variation	Elm 00761 V3 - Moderate Variation	Grove 00769 V3 - Moderate Variation	Nest 00774 V2 - Slight Variation	Echo 00775 V2 - Slight Variation

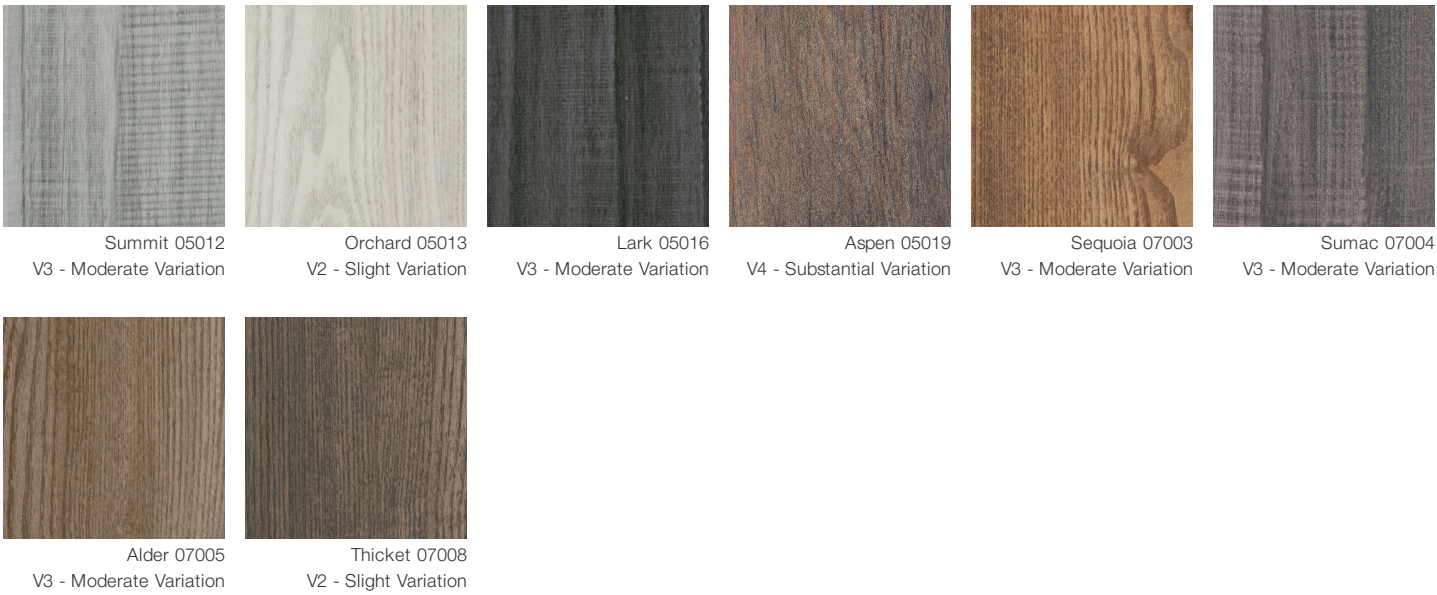



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1

Uniform Appearance

V2

Slight Variation

V3

Moderate Variation

V4

Substantial Variation

