

Terrain II 12 Mil


|                                |   |                          |
|--------------------------------|---|--------------------------|
| Collection                     | Terrain II  |                          |
| Numéro De Style                | 0453V   |                          |
| Construction                   | Carreau De Vinyle De Luxe Commercial Léger  |                          |
| classe                         | Class III, Type B   |                          |
| Finition                       | ExoGuard+®  |                          |
|                                | Impérial  | Métrique                 |
| Dimensions Nominales           | 6 in w x 48 in l  | 15 cm w x 122 cm l       |
| Dimensions Réelles             | 5.96 in w x 48.00 in l  | 15.14 cm w x 121.92 cm l |
| Épaisseur De La Couche d'Usure | 12 mil (0.012 in)   | 0.3 mm                   |
| Épaisseur Générale Du Produit  | 0.098 in  | 2.5 mm                   |
| Profil Du Bord                 | Bord Carré  |                          |
| Installation Type              | Dry Back  |                          |
| Installation                   | Direct Glue   |                          |
| Adhésif Recommandé             | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon |                          |

Emballage

|                    |             |           |
|--------------------|-------------|-----------|
| Pièces Par Carton  | 21 pcs      |           |
| Surface Par Carton | 41.72 sq ft | 3.88 sq m |
| Poids Par Carton   | 36 lbs      | 16.33 kg  |



Méthodes d'Installation Conseillées

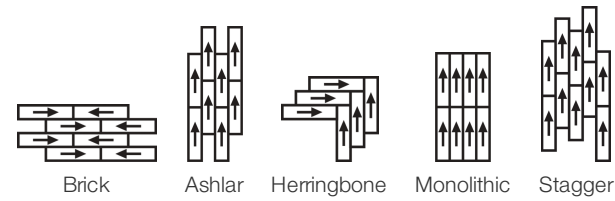

Coordination Des Produits

None: Terrain II Rigid Core  
LVT: Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm

Performance + Tests Et Essai

|  |   |
|--|---|
| Poinçonnement Rémanent (Astm F1914)  | Passes  |
| Résistance À La Chaleur (Astm F1514)   | Passes  |
| Résistance À La Lumière (Astm F1515)   | Passes  |
| Résistance Chimique (Astm F925)  | Passes  |
| Coefficient De Frottement (Astm D2407, Résistance Au Glissement)   | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. |   |

Garanties

Limitée Commerciale De 7 Ans

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Attributs + Certifications

|   |  |
|---|--|
| Health & Wellbeing                      |  |
| Material Ingredient Transparency        | Health Product Declaration (HPD)   1000 ppm Disclosure                                       |
| Climate Impact                          |  |
| Environmental Product Declaration (EPD) | Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017 |
| Total Recycled Content                  | 30% (Pre-Consumer 30%   Post-Consumer 0%)  |
| Global Product Assessment               | FloorScore®   Agréé  |
|   | CE Marking (EN 14041)   Certifié Par Un Tiers  |
|   | Country of Origin   United States  |


Contribution Au Certificat Vert Leed

|  |  |
|--|--|
| « Crédit MR : Divulcation et optimisation des produits de construction | Health Product Declaration (HPD)   100 Ppm Disclosure                        |
| « Crédit MR : Divulcation et optimisation des produits de construction | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Crédit EQ : matériaux faibles émissions                                | FloorScore Certified   |


Informations Supplémentaires

|   |  |
|---|--|
| * To learn more about the recyclability of our products and our Environmental Guarantee, please visit <a href="#">shawcontract.com/sustainability</a> . |  |
| <a href="#">Installation Guidelines</a>   | Please visit <a href="#">www.shawcontract.com</a> for the most current warranty information.   |
| <a href="#">Maintenance Guidelines</a>  | Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.   |
|   | This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.   |
|   | *****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs. |
|   | Visit <a href="#">shawcontract.com/testing</a> for more information.   |


Available Colorways




Satinwood 00140




Willow 00170  
V3 - Moderate Variation




Thatch 00173  
V2 - Slight Variation




Ash 00174  
V3 - Moderate Variation




Butternut 00210




Prime 00240




Trail 00256




Poplar 00515




Shade 00564  
V2 - Slight Variation




Root 00568  
V4 - Substantial Variation




Timber 00572  
V2 - Slight Variation




Taun 00660




Pirch 00684  
V2 - Slight Variation




Lodge 00740




Elm 00761




Grove 00769




Nest 00774  
V2 - Slight Variation




Echo 00775  
V2 - Slight Variation




Summit 05012  
V3 - Moderate Variation




Orchard 05013  
V2 - Slight Variation




Lark 05016  
V3 - Moderate Variation




Aspen 05019  
V4 - Substantial Variation




Sequoia 07003  
V2 - Slight Variation



Sumac 07004  
V3 - Moderate Variation



Alder 07005  
V2 - Slight Variation



Thicket 07008  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

