

Terrain II 20 Mil


Collection	Terrain II	
Style Number	0454V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, 4200 Resilient Tile 1 Gallon, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon, 2200 Semi-Wet Resilient 1 Gallon, 4252 Multi-Use (No Heavy Rolling or Static Loads) or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces Per Carton	21 pcs	
Area Per Carton	41.72 sq ft	3.88 sq m
Weight Per Carton	35.44 lbs	16.08 kg



Recommended Installation Method

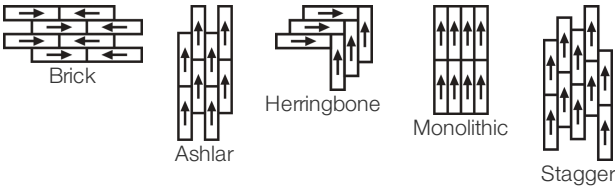

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 30 Mil

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

- 15 Year Commercial Limited
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	9.59 Kg CO ₂ /M ²
Total Recycled Content	30% (Pre-Consumer 30% Post-Consumer 0%)
Global Product Assessment	
Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.	
CE Marking (EN 14041) 3rd Party Certified	
Country of Origin United States	

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore® & Greenguard Gold Certificate
- Health Product Declaration (HPD) | 1000 Ppm Disclosure

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting
MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)
EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

- Health Product Declaration (HPD) | 1000 Ppm Disclosure
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore® Certified

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)













[Maintenance Guidelines](#)


Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


Visit shawcontract.com/testing for more information.

Available Colorways

 <div>Satinwood 00140 V3 - Moderate Variation</div>	 <div>Willow 00170 LRV 21 L* 53 V4 - Substantial Variation</div>	 <div>Thatch 00173 LRV 31.3 L* 62.75 V2 - Slight Variation</div>	 <div>Ash 00174 LRV 30.5 L* 62.09 V3 - Moderate Variation</div>	 <div>Butternut 00210 V3 - Moderate Variation</div>	 <div>Saffron 00230 V2 - Slight Variation</div>
 <div>Prime 00240 V3 - Moderate Variation</div>	 <div>Trail 00256 LRV 19.2 L* 50.94 V2 - Slight Variation</div>	 <div>Olive 00350 V2 - Slight Variation</div>	 <div>Spruce 00360 V2 - Slight Variation</div>	 <div>Aqua 00370 V2 - Slight Variation</div>	 <div>Azure 00400 V2 - Slight Variation</div>



Ink 00450
V2 - Slight Variation



Poplar 00515
V3 - Moderate Variation



Slate 00540
V2 - Slight Variation



Shade 00564
LRV 11.3 | L* 40.07
V2 - Slight Variation



Root 00568
LRV 20.2 | L* 52.07
V3 - Moderate Variation




Timber 00572
LRV 19.9 | L* 51.69
V2 - Slight Variation



Graphite 00580
V2 - Slight Variation



Terra 00600
V2 - Slight Variation



Redwood 00650
V2 - Slight Variation




Taun 00660
V3 - Moderate Variation



Pirch 00684
LRV 17.6 | L* 49.04
V2 - Slight Variation



Natural 00710
V2 - Slight Variation



Lodge 00740
LRV 7.1 | L* 32
V2 - Slight Variation



Elm 00761
V3 - Moderate Variation




Grove 00769
LRV 11.8 | L* 40.96
V3 - Moderate Variation




Nest 00774
LRV 13 | L* 42.77
V2 - Slight Variation




Echo 00775
LRV 27.8 | L* 57.75
V2 - Slight Variation



Cherry 00850
V2 - Slight Variation



Violet 00965
V2 - Slight Variation




Summit 05012
LRV 31 | L* 62.51
V3 - Moderate Variation




Orchard 05013
LRV 46.7 | L* 74.01
V2 - Slight Variation



Lark 05016
LRV 7.9 | L* 33.79
V3 - Moderate Variation



Aspen 05019
LRV 9.1 | L* 37.76
V3 - Moderate Variation




Sequoia 07003
LRV 14.5 | L* 44.92
V3 - Moderate Variation



Sumac 07004
LRV 16.1 | L* 47.17
V3 - Moderate Variation



Alder 07005
LRV 17 | L* 48.28
V3 - Moderate Variation



Thicket 07008
LRV 8.1 | L* 34.18
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

