

Rethink


| | | |
|---------------------------|--|-------------------------|
| Collection | Rethink | |
| Style Number | 0733V | |
| Construction | Commercial Woven Luxury Vinyl Tile | |
| class | Class II, Type B | |
| Finish | ExoGuard® | |
| | U.s. | Metric |
| Nominal Dimensions | 9 in w x 36 in l | 23 cm w x 91 cm l |
| Actual Dimensions | 9.00 in w x 36.00 in l | 22.86 cm w x 91.44 cm l |
| Overall Product Thickness | 0.118 in | 3 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|----------------|-----------|-----------|
| Pieces Per Box | 16 pcs | |
| Area Per Box | 36 sq ft | 3.34 sq m |
| Weight Per Box | 37.48 lbs | 17 kg |



Recommended Installation Method

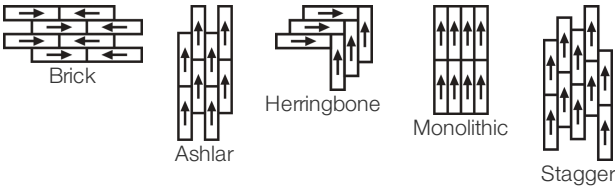

performance + testing

| | |
|---|---|
| resistance to heat (ASTM F1514) | Passes |
| resistance to light (ASTM F1515) | Passes |
| resistance to chemicals (ASTM F925) | Passes |
| radiant panel (ASTM E648) | Passes, Class I |
| coefficient of friction (ASTM D2407, slip resistance) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

| | |
|---|--|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 7.31 Kg Co ₂ /M ² |
| Life-Cycle Carbon Emissions | Low Embodied Carbon |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) 3rd Party Certified |
| | Country of Origin Imported |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | FloorScore Certificate |

Green Leed Contribution Credit

| | |
|---|---|
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | FloorScore® Certified |

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|--|---|---|---|---|
|  <div>Hybrid 33100 LRV 20.4 L* 52.26 V1 - Uniform Appearance</div> |  <div>Structure 33150 LRV 18.9 L* 50.53 V1 - Uniform Appearance</div> |  <div>Minimal 33155 LRV 30.7 L* 63.58 V1 - Uniform Appearance</div> |  <div>Essence 33340 LRV 22.7 L* 54.76 V1 - Uniform Appearance</div> |  <div>Energy 33405 LRV 16.4 L* 47.53 V1 - Uniform Appearance</div> |  <div>Carbon 33505 LRV 12.2 L* 41.52 V1 - Uniform Appearance</div> |
|  <div>Core 33515 LRV 32.7 L* 63.93 V1 - Uniform Appearance</div> |  <div>Metal 33530 LRV 20.7 L* 52.62 V1 - Uniform Appearance</div> |  <div>Industry 33751 LRV 14.9 L* 45.47 V1 - Uniform Appearance</div> |  <div>Element 33755 LRV 16.5 L* 47.66 V1 - Uniform Appearance</div> |  <div>Smart 33856 LRV 17.3 L* 48.58 V1 - Uniform Appearance</div> |  <div>Innovate 33991 LRV 17.1 L* 48.38 V1 - Uniform Appearance</div> |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

