

Rethink

Style Number	0733V	
Product Type	Commercial Woven Luxury Vinyl Tile	
Collection	Rethink	
Construction	Standard	Data + Performance
Type of Floorcovering	EN 1307	textile vinyl tile without pile
Classification	ISO 10874	33 commercial heavy
Total Mass	EN ISO 23997	4.95 kg/m <sup>2</sup>
Total Thickness	EN ISO 24346	3 mm
Finish		ExoGuard™ quartz enhanced urethane
Dimensions	EN 994	22.86 cm x 91.44 cm   16 tiles (3.34 sq m) per box
Weight per Box		17 kg




Performance

Flammability	EN 13501-1	Bfl-S1 (unadhered testing)
Thermal Resistance m <sup>2</sup> K/W	ISO 8302	0.020 m <sup>2</sup> K/W TOG 0.2
Electrostatic Propensity	EN 1815	≤ 2.0 kV (stroll test)
Slip Resistance	BS 7976-2	
	DIN 51130	R12 (shod ramp)
Dimensional Stability	EN ISO 23999	≤0.15%
Castor Chair	EN 425, ISO 4918	continuous use
Resistance to Damage at Cut Edges	EN 1814	passed
Residual Indentation	EN ISO 24343-1	0.1 mm
Impact Sound Reduction	BS EN ISO 10140	ΔLw 6dB/17dB with 3mm underlay
Sound Absorption	ISO 354	
Colour Fastness to Light	BS EN ISO 105-BO2	8
Emissions	ISO 16000	TVOC < 1000 µg/m3 after 28 days

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Recommended Installation Method

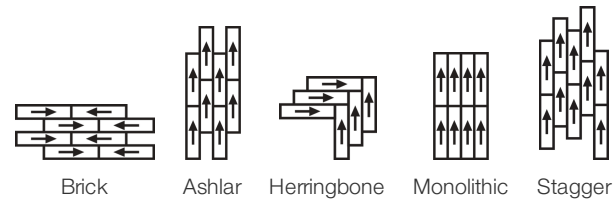

colour and visual variation index

V1


V2

V3

V4

V1 uniform appearance  
V2 slight variation  
V3 moderate variation  
V4 substantial variation

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

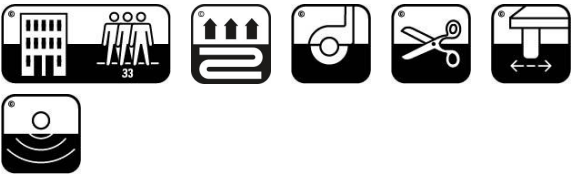

ΔLw 6dB/17dB with 3mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

Health Product Declaration (HPD)	<a href="#">1000 ppm Disclosure</a>
Environmental Product Declaration (EPD)	<a href="#">3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</a>
Embodied Carbon (Cradle to Gate)	<b>7.31 Kg Co<sub>2</sub>/M<sup>2</sup></b>
FloorScore®	<b>Certified</b>
CE Marking (EN 14041)	<b>3rd Party Certified</b>
Total Recycled Content	<b>0% (Pre-Consumer 0%   Post-Consumer 0%)</b>
Country of Origin	<b>South Korea</b>

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>FloorScore Certificate</b>

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	<b>Health Product Declaration (HPD)   100 Ppm Disclosure</b>
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>FloorScore Certified</b>

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Light Reflectance Value

					
Hybrid 33100 LRV 20.4 V1 - Uniform Appearance	Structure 33150 LRV 18.9 V1 - Uniform Appearance	Minimal 33155 LRV 30.7 V1 - Uniform Appearance	Essence 33340 LRV 22.7 V1 - Uniform Appearance	Energy 33405 LRV 16.4 V1 - Uniform Appearance	Carbon 33505 LRV 12.2 V1 - Uniform Appearance
					
Core 33515 LRV 32.7 V1 - Uniform Appearance	Metal 33530 LRV 20.7 V1 - Uniform Appearance	Industry 33751 LRV 14.9 V1 - Uniform Appearance	Element 33755 LRV 16.5 V1 - Uniform Appearance	Smart 33856 LRV 17.3 V1 - Uniform Appearance	Innovate 33991 LRV 17.1 V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

