

## Emerge


Collection	<b>Noble Materials</b>	
Style Number	<b>0618V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard®</b>	
	U.S.	Metric
Nominal Dimensions	<b>24 in w x 24 in l</b>	<b>60 cm w x 60 cm l</b>
Actual Dimensions	<b>23.62 in w x 23.62 in l</b>	<b>59.99 cm w x 59.99 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	



### Packaging

Pieces per Carton	<b>17 pcs</b>	
Area per Carton	<b>65.88 sq ft</b>	<b>6.12 sq m</b>
Weight per Carton	<b>57.9 lbs</b>	<b>26.26 kg</b>

### Recommended Installation Method

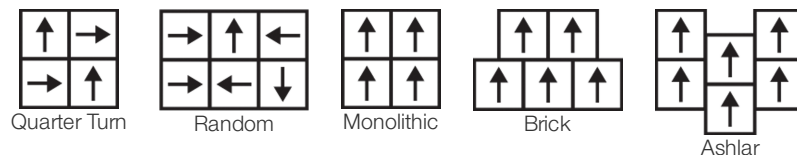

### Coordinating Products

Carpet Tile: Slab Tile, Honed Tile, Alchemy Tile, Form Tile  
 Broadloom: Monolith Woven, Base Metal Woven, Strata, Fault

### Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *1000 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	<b>Passes</b>	
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>	

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

GSA | Approved  
CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition  
  
X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
  
X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization  
  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization

Absence of Asbestos  
  
Absence of Heavy Metals  
  
Absence of Halogenated Flame Retardants  
  
Ortho-Phthalates  
  
FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations


Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways



Carrara Silver 18100  
V2 - Slight Variation




Alabaster Gold 18111  
V2 - Slight Variation




Colossal Bismut 18496  
V2 - Slight Variation




Onyx Silver 18505  
V2 - Slight Variation



Element Platinu 18506  
V2 - Slight Variation



Forge Platinum 18518  
V2 - Slight Variation



Talc Platinum 18535  
V2 - Slight Variation



Cornerstone Cop 18555  
V2 - Slight Variation



Slate Palladium 18595  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation