

Unveil


コレクション	Vertical Layers	
スタイルナンバー	0601V	
建設	Heavy Commercial Luxury Vinyl Tile	
クラス	Class III, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	9 in w x 36 in l	23 cm w x 91 cm l
実際の寸法	9.00 in w x 36.00 in l	22.86 cm w x 91.44 cm l
摩耗層の厚さ	30 mil (0.03 in)	0.76 mm
製品全体の厚さ	0.118 in	3 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Dry Back	
インストール	Direct Glue	
推奨接着剤	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	16 pcs	
ボックスあたりの面積	36 sq ft	3.34 sq m
ボックスあたりの重量	35.27 lbs	16 kg



推奨インストール方法

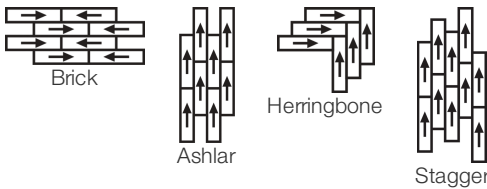

コーディネート商品

Carpet Tile: Tinge Tile, Undertone Tile

パフォーマンス + テスト

残留圧痕 (ASTM F1914)	Passes
耐熱性 (ASTM F1514)	Passes
耐光性 (ASTM F1515)	Passes
耐薬品性 (ASTM F925)	Passes
放射パネル (ASTM E648)	Passes, Class I
摩擦係数(ASTM D2407、滑り抵抗)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 保証

[Commercial 15 Year Underbed Bond Warranty](#)[15年の商用限定保証](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 属性+認定

## Health &amp; Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)[FloorScore® | 認証取得](#)

## Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

[ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得](#)7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Low Embodied Carbon

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 第三者認証取得

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos****Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore Certificate**

## グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築

環境製品宣言-オプション1：環境製品宣言 (EPD)

EQクレジット：低排出材料

オプション1：製品カテゴリの計算

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore® Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Faded 01103  
V2 - Slight Variation



Bleached 01111  
V2 - Slight Variation



Ferric 01211  
V2 - Slight Variation



Patina 01326  
V2 - Slight Variation



Weathered 01405  
V2 - Slight Variation



Burnish 01486  
V2 - Slight Variation



Oxidize 01504  
V2 - Slight Variation



Alter 01518  
V2 - Slight Variation



Grit 01530  
V2 - Slight Variation



Tinted 01535  
V2 - Slight Variation



Char 01555  
V2 - Slight Variation



Tarnish 01585  
V2 - Slight Variation



Industrial 01675  
V2 - Slight Variation



Rust 01855  
V2 - Slight Variation



Alum 01991  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

