

Unveil


수집	Vertical Layers	
스타일 번호	0601V	
구성	Heavy Commercial Luxury Vinyl Tile	
수업	Class III, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	9 in w x 36 in l	23 cm w x 91 cm l
실제 치수	9.00 in w x 36.00 in l	22.86 cm w x 91.44 cm l
마모 층 두께	30 mil (0.03 in)	0.76 mm
전체 제품 두께	0.118 in	3 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

포장

상자 당 조각	16 pcs	
상자 당 면적	36 sq ft	3.34 sq m
상자 당 무게	35.27 lbs	16 kg



권장 설치 방법

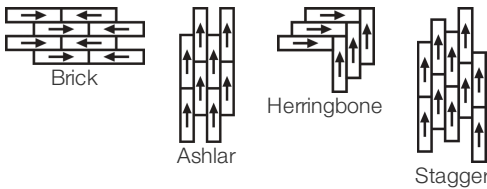

코디네이팅 제품

Carpet Tile: Tinge Tile, Undertone Tile

공연 + 테스트

- 잔차 들어 쓰기 (ASTM F1914)
- 내열성 (ASTM F1514)
- 내광성 (ASTM F1515)
- 화학 물질에 대한 내성 (ASTM F925)
- 복사 패널 (ASTM E648)
- 마찰 계수 (ASTM D2407, 미끄러짐 저항)

Passes

Passes

Passes

Passes

Passes, Class I

>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 보증

[15년 상용 제한](#)[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 속성 + 인증

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | 인증](#)

## Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

[ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득](#)  
7.31 Kg Co<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 타사 인증 획득  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

## 녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Faded 01103  
V2 - Slight Variation



Bleached 01111  
V2 - Slight Variation



Ferric 01211  
V2 - Slight Variation



Patina 01326  
V2 - Slight Variation



Weathered 01405  
V2 - Slight Variation



Burnish 01486  
V2 - Slight Variation



Oxidize 01504  
V2 - Slight Variation



Alter 01518  
V2 - Slight Variation



Grit 01530  
V2 - Slight Variation



Tinted 01535  
V2 - Slight Variation



Char 01555  
V2 - Slight Variation



Tarnish 01585  
V2 - Slight Variation



Industrial 01675  
V2 - Slight Variation



Rust 01855  
V2 - Slight Variation



Alum 01991  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

