

Solitude


Colección	Solitude	
Número De Estilo	0648V	
Construcción	Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio	
clase	Class III, Type B	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensiones Reales	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.197 in	5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	



Embalaje

Piezas Por Caja	10 pcs	
Área Por Caja	20 sq ft	1.86 sq m
Peso Por Caja	35.1 lbs	15.92 kg

Método De Instalación Recomendado

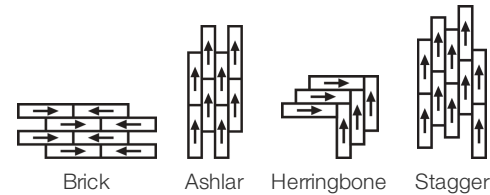

Desempeño + Pruebas

Carga Estática (Astm F970)	Passes (Modified), *1500 lbs	Esta Prueba Tiene La Función De Comparar Propiedades Relativas De Diferentes Estilos Y Construcciones. Los Resultados Se Basan En Una Prueba De Laboratorio Y Se Utilizan Con Fines Comparativos: El Límite De Carga En La Vida Real Puede Variar.
Margen Adicional Residual (Astm F1914)	Passes	
Resistencia Al Calor (Astm F1514)	Passes	
Resistencia A La Luz (Astm F1515)	Passes	
Resistencia A Productos Químicos (Astm F925)	Passes	
Panel Radiante (Astm E648)	Passes, Class I	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
Coefficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento)		

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017  
  
7.31 Kg Co<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certificado Tercerizado  
Country of Origin | Imported

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales  
  
Crédito MR: Divulgación y optimización de productos de construcción  
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)  
  
Crédito EQ: Materiales de baja emisión  
Opción 1: Cálculos de categoría de producto

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
  
**FloorScore Certified**

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

 <div>Cocoa 48103 LRV 20.8   L* 52.74 V2 - Slight Variation</div>	 <div>Cottonwood 48120 LRV 42.5   L* 71.25 V2 - Slight Variation</div>	 <div>Natural 48250 LRV 28.7   L* 60.55 V2 - Slight Variation</div>	 <div>Smoke 48506 LRV 26.3   L* 58.3 V2 - Slight Variation</div>	 <div>Fawn 48516 LRV 25.7   L* 57.74 V2 - Slight Variation</div>	 <div>Urban Ash 48540 V2 - Slight Variation</div>
 <div>Char 48549 LRV 7.2   L* 32.3 V2 - Slight Variation</div>	 <div>Pewter 48595 LRV 22.6   L* 54.67 V2 - Slight Variation</div>	 <div>French Grey 48599 LRV 20.8   L* 52.69 V3 - Moderate Variation</div>	 <div>Mink 48720 LRV 16.8   L* 47.99 V3 - Moderate Variation</div>	 <div>Woodland 48760 LRV 17.2   L* 48.51 V2 - Slight Variation</div>	 <div>Umber 48761 LRV 11   L* 39.65 V2 - Slight Variation</div>

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

