

Solitude


| | | |
|-------------------|--|--------------------------|
| コレクション | Solitude | |
| スタイルナンバー | 0648V | |
| 建設 | グラスファイバーの重い商業高級ビニールタイル | |
| クラス | Class III, Type B | |
| 仕上げ | ExoGuard® | |
| | 米国 | メートル法 |
| 公称寸法 | 6 in w x 48 in l | 15 cm w x 122 cm l |
| 実際の寸法 | 6.00 in w x 48.00 in l | 15.24 cm w x 121.92 cm l |
| 摩耗層の厚さ | 20 mil (0.02 in) | 0.51 mm |
| 製品全体の厚さ | 0.197 in | 5 mm |
| エッジプロファイル | スクエア エッジ | |
| Installation Type | Dry Back | |
| インストール | Direct Glue | |
| 推奨接着剤 | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

包装

| | | |
|------------|----------|-----------|
| ボックスあたりの個数 | 10 pcs | |
| ボックスあたりの面積 | 20 sq ft | 1.86 sq m |
| ボックスあたりの重量 | 35.1 lbs | 15.92 kg |



推奨インストール方法

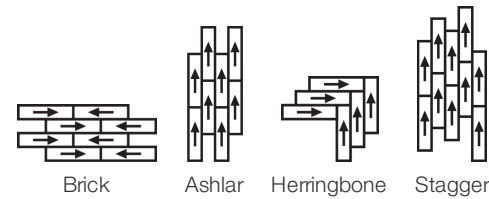

パフォーマンス + テスト

| | | |
|-----------------------|---|--|
| 静荷重 (astm F970) | Passes (Modified), *1500 lbs | このテストは、さまざまなスタイルと構造の相対的な特性を比較することを目的としています。結果は実験室でのテストに基づいており、比較の目的で使用されています。実際の負荷制限は異なる場合があります。 |
| 残留圧痕 (astm F1914) | Passes | |
| 耐熱性 (astm F1514) | Passes | |
| 耐光性 (astm F1515) | Passes | |
| 耐薬品性 (astm F925) | Passes | |
| 放射パネル (astm E648) | Passes, Class I | |
| 摩擦係数(astm D2407、滑り抵抗) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

15年の商用限定保証
Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

属性+認定

| | |
|---|--|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® 認証取得 |
| Climate Impact | |
| Environmental Product Declaration (EPD) | ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得 |
| Embodied Carbon (Cradle to Gate) | 7.31 Kg Co ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) 第三者認証取得 |
| | Country of Origin Imported |

グリーンリード貢献クレジット

| | |
|---|--|
| MRクレジット：製品の開示と最適化の構築 材料成分-オプション1：材料成分レポート | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MRクレジット：製品の開示と最適化の構築 環境製品宣言-オプション1：環境製品宣言（EPD） | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQクレジット：低排出材料 オプション1：製品カテゴリの計算 | FloorScore Certified |
| Installation Guidelines | Please visit www.shawcontract.com for the most current warranty information. |
| Maintenance Guidelines | Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. |
| | This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. |
| | *****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs. |
| | Visit shawcontract.com/testing for more information. |

Available Colorways

| | | | | | |
|---|---|--|--|---|--|
|  <div>Cocoa 48103 LRV 20.8 L* 52.74 V2 - Slight Variation</div> |  <div>Cottonwood 48120 LRV 42.5 L* 71.25 V2 - Slight Variation</div> |  <div>Natural 48250 LRV 28.7 L* 60.55 V2 - Slight Variation</div> |  <div>Smoke 48506 LRV 26.3 L* 58.3 V2 - Slight Variation</div> |  <div>Fawn 48516 LRV 25.7 L* 57.74 V2 - Slight Variation</div> |  <div>Urban Ash 48540 V2 - Slight Variation</div> |
|  <div>Char 48549 LRV 7.2 L* 32.3 V2 - Slight Variation</div> |  <div>Pewter 48595 LRV 22.6 L* 54.67 V2 - Slight Variation</div> |  <div>French Grey 48599 LRV 20.8 L* 52.69 V3 - Moderate Variation</div> |  <div>Mink 48720 LRV 16.8 L* 47.99 V3 - Moderate Variation</div> |  <div>Woodland 48760 LRV 17.2 L* 48.51 V2 - Slight Variation</div> |  <div>Umber 48761 LRV 11 L* 39.65 V2 - Slight Variation</div> |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

