

Solitude


Coleção	Solitude	
Número Do Produto	0648V	
Construção	Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	15 cm w x 122 cm l
Dimensões Reais	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	20 sq ft	1.86 sq m
Peso Por Caixa	35.1 lbs	15.92 kg



Método De Instalação Recomendado

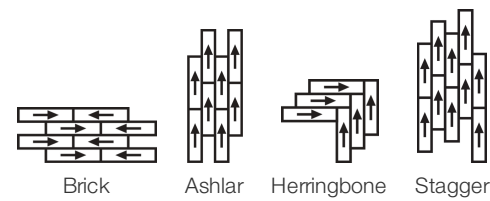

Desempenho + Teste

Carga Estática (Astm F970)	Passes (Modified), *1500 lbs	Este Teste Tem Como Objetivo Comparar Propriedades Relativas De Diferentes Estilos E Construções. Os Resultados São Baseados Em Um Teste De Laboratório E Usados Para Fins Comparativos - O Limite De Carga Na Vida Real Pode Variar.
Recuo Residual (Astm F1914)	Passes	
Resistência Ao Calor (Astm F1514)	Passes	
Resistência À Luz (Astm F1515)	Passes	
Resistência A Produtos Químicos (Astm F925)	Passes	
Painel Radiante (Astm E648)	Passes, Class I	Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.
Coefficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017  
7.31 Kg Co<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certificado 3rd Party  
Country of Origin | Imported

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais  
  
MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)  
  
Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore Certified

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

 <div>Cocoa 48103 LRV 20.8   L* 52.74 V2 - Slight Variation</div>	 <div>Cottonwood 48120 LRV 42.5   L* 71.25 V2 - Slight Variation</div>	 <div>Natural 48250 LRV 28.7   L* 60.55 V2 - Slight Variation</div>	 <div>Smoke 48506 LRV 26.3   L* 58.3 V2 - Slight Variation</div>	 <div>Fawn 48516 LRV 25.7   L* 57.74 V2 - Slight Variation</div>	 <div>Urban Ash 48540 V2 - Slight Variation</div>
 <div>Char 48549 LRV 7.2   L* 32.3 V2 - Slight Variation</div>	 <div>Pewter 48595 LRV 22.6   L* 54.67 V2 - Slight Variation</div>	 <div>French Grey 48599 LRV 20.8   L* 52.69 V3 - Moderate Variation</div>	 <div>Mink 48720 LRV 16.8   L* 47.99 V3 - Moderate Variation</div>	 <div>Woodland 48760 LRV 17.2   L* 48.51 V2 - Slight Variation</div>	 <div>Umber 48761 LRV 11   L* 39.65 V2 - Slight Variation</div>

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

