

Solitude


Collection	Solitude	
Numéro Du Style	0648V	
Construction	Heavy Commercial Luxury Vinyl Tile With Fiberglass	
Classement	Class III, Type B	
Finition	ExoGuard®	
	U.s.	Metric
Dimensions Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensions Réelles	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pièces Par Carton	10 pcs	
Surface Par Carton	20 sq ft	1.86 sq m
Poids Par Carton	35.1 lbs	15.92 kg



Méthodes d'Installation Conseillées

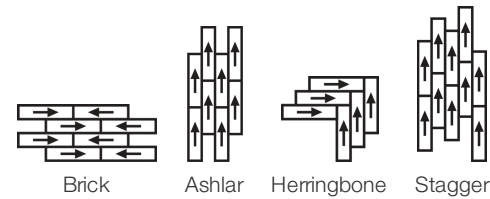

Performance + Tests Et Essai

Empreinte Résiduelle (Astm F1914)	Passes
Résistance À La Chaleur (Astm F1514)	Passes
Résistance À La Lumière (Astm F1515)	Passes
Résistance Chimique (Astm F925)	Passes
Coefficient De Frottement (Astm D2407, Résistance Au Glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

Limitée Commerciale De 15 Ans
[Commercial 15 Year Underbed Bond Warranty](#)

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

Déclaration sanitaire de produit (HPD)	1000 ppm Disclosure
Déclaration environnementale de produit (EPD)	Certifié Par Un Organisme Tiers Conformément Aux Normes ISO 14025, EN15804 & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	7.31 Kg Co₂/M²
FloorScore®	Certifié
Label CE (EN 14041)	Certifié Par Un Organisme Tiers
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
pays d'origine	South Korea

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Contribution À La Certification Leed

MR Credit: Building Product Disclosure and Optimisation Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimisation Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified

[Installation Guidelines](#)

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.


Indice De Réflexion Lumineuse




Cocoa 48103
LRV 20.8
V2 - Slight Variation



Cottonwood 48120
LRV 42.5
V2 - Slight Variation




Natural 48250
LRV 28.7
V2 - Slight Variation



Smoke 48506
LRV 26.3
V2 - Slight Variation



Fawn 48516
LRV 25.7
V2 - Slight Variation



Urban Ash 48540
V2 - Slight Variation




Char 48549
LRV 7.2
V2 - Slight Variation



Pewter 48595
LRV 22.6
V2 - Slight Variation




French Grey 48599
LRV 20.8
V3 - Moderate Variation



Mink 48720
LRV 16.8
V3 - Moderate Variation



Woodland 48760
LRV 17.2
V2 - Slight Variation



Umber 48761
LRV 11
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

