

## Cut


Collection	<b>Natural Choreography</b>	
Style Number	<b>0922V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile With Fiberglass</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard®</b>	
	U.S.	Metric
Nominal Dimensions	<b>18 in w x 18 in l</b>	<b>46 cm w x 46 cm l</b>
Actual Dimensions	<b>18.00 in w x 18.00 in l</b>	<b>45.72 cm w x 45.72 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.197 in</b>	<b>5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	



## Packaging

Pieces per Carton	<b>10 pcs</b>	
Area per Carton	<b>22.5 sq ft</b>	<b>2.09 sq m</b>
Weight per Carton	<b>30.86 lbs</b>	<b>14 kg</b>

## Recommended Installation Method

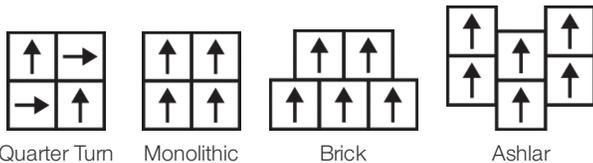

## Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *1200 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[15 Year Commercial Limited Warranty](#)

[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

### Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
  
7.31 Kg CO<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition  
  
X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
  
X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization  
  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates**

**FloorScore Certificate**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. \*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Ecrú 22103  
LRV 29.7 | L\* 61.38  
V2 - Slight Variation




Mushroom 22155  
LRV 21.7 | L\* 53.72  
V2 - Slight Variation




Talc 22174  
LRV 24.7 | L\* 56.74  
V2 - Slight Variation



Honey 22280  
LRV 16.1 | L\* 47.13  
V2 - Slight Variation



Charcoal 22549  
LRV 11.3 | L\* 40.13  
V2 - Slight Variation



Ash 22599  
LRV 16.1 | L\* 47.04  
V2 - Slight Variation



Cacao 22704  
LRV 8.4 | L\* 34.77  
V2 - Slight Variation



Sienna 22760  
LRV 8.8 | L\* 35.66  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

