

Cut


수집	Natural Choreography	
스타일 번호	0922V	
구성	섬유 유리를 가진 헤비급 상업적인 고급 비닐 도와	
수업	Class III, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	18 in w x 18 in l	46 cm w x 46 cm l
실제 치수	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
마모 층 두께	20 mil (0.02 in)	0.51 mm
전체 제품 두께	0.197 in	5 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

포장

상자 당 조각	10 pcs	
상자 당 면적	22.5 sq ft	2.09 sq m
상자 당 무게	30.86 lbs	14 kg



권장 설치 방법

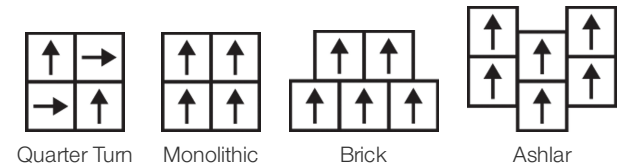

공연 + 테스트

내열성 (Astm F1514)
내광성 (Astm F1515)
화학 물질에 대한 내성 (Astm F925)
마찰 계수 (astm D2407, 미끄러짐 저항)

Passes
Passes
Passes
≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

15년 상용 제한  
Commercial 15 Year Underbed Bond Warranty

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

속성 + 인증

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득

Embodied Carbon (Cradle to Gate)

7.31 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | 인증

Country of Origin | Imported

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축

재료 성분-옵션 1 : 재료 성분보고

MR 크레딧 : 제품 공개 및 최적화 구축

환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)

EQ 크레딧 : 저 발광 재료

옵션 1 : 제품 범주 계산

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways




Ecrú 22103  
LRV 29.7  
V2 - Slight Variation




Mushroom 22155  
LRV 21.7  
V2 - Slight Variation




Talc 22174  
LRV 24.7  
V2 - Slight Variation




Honey 22280  
LRV 16.1  
V2 - Slight Variation




Charcoal 22549  
LRV 11.3  
V2 - Slight Variation



Ash 22599  
LRV 16.1  
V2 - Slight Variation



Cacao 22704  
LRV 8.4  
V2 - Slight Variation



Sienna 22760  
LRV 8.8  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

